




## Features

- ✧ Small surface mounting type.
- ✧ High speed.
- ✧ High reliability with high surge current handing capability.

## Applications

- ✧ For general purpose switching applications.

**SOT-323**

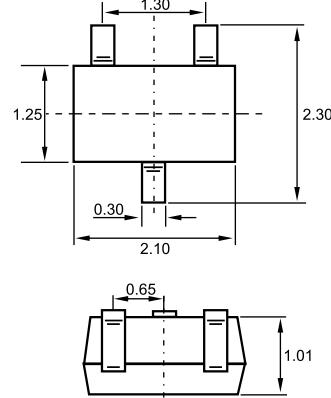

Dimensions in inches and (millimeters)

## Ordering Information

Type No.	Marking	Package Code
1SS370	F5	SOT-323

**MAXIMUM RATING** @ Ta=25°C unless otherwise specified

Parameter	Symbol	Limits	Unit
Non-Repetitive Peak reverse voltage	V <sub>RM</sub>	250	V
Diode reverse voltage	V <sub>R</sub>	200	V
Forward peak Current(max.)	I <sub>FM</sub>	300	mA
Average forward output Current	I <sub>O</sub>	100	mA
Forward Surge Current (10ms)	I <sub>FSM</sub>	2	A
Power Dissipation	P <sub>d</sub>	100	mW
Junction temperature	T <sub>j</sub>	125	°C
Storage temperature range	T <sub>stg</sub>	-55~+125	°C

**ELECTRICAL CHARACTERISTICS** @ Ta=25°C unless otherwise specified

Parameter	Symbol	Test conditions	MIN	MAX	UNIT
Reverse current	I <sub>R</sub>	V <sub>R</sub> =50V V <sub>R</sub> =200V		0.1 1	µA
Forward voltage	V <sub>F</sub>	I <sub>F</sub> =10mA I <sub>F</sub> =100mA		1 1.2	V
Diode capacitance	C <sub>D</sub>	V <sub>R</sub> =0V f=1MHz		3.0	pF
Reverse recovery time	t <sub>rr</sub>	I <sub>F</sub> =I <sub>R</sub> =10mA V <sub>R</sub> =6V I <sub>rr</sub> =I <sub>R</sub> *0.1		60	nS