


1. BASE
2. COLLECTOR
3. EMITTER

## Features

- ◇ Complementary to CZT32C
- ◇ Power amplifier applications up to 3.0 amps.

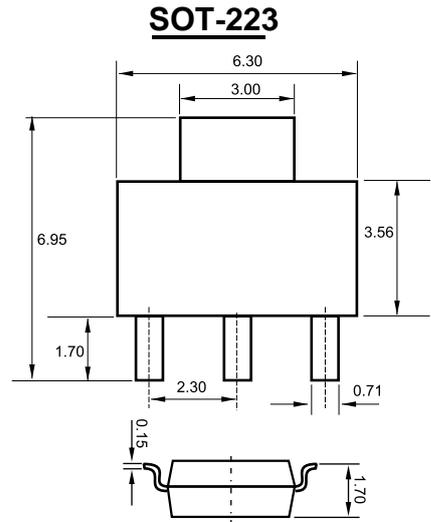

## MAXIMUM RATINGS ( $T_A=25^\circ\text{C}$ unless otherwise noted)

Dimensions in inches and (millimeters)

Symbol	Parameter	Value	Units
$V_{CBO}$	Collector-Base Voltage	100	V
$V_{CEO}$	Collector-Emitter Voltage	100	V
$V_{EBO}$	Emitter-Base Voltage	5	V
$I_C$	Collector Current -Continuous	3	A
$P_C$	Collector Power Dissipation	1	W
$T_j$	Junction Temperature	150	$^\circ\text{C}$
$T_{stg}$	Storage Temperature	-65-150	$^\circ\text{C}$

## ELECTRICAL CHARACTERISTICS ( $T_{amb}=25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C=1\text{mA}, I_E=0$	100			V
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	$I_C=30\text{mA}, I_B=0$	100			V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E=3\text{mA}, I_C=0$	5			V
Collector cut-off current	$I_{CBO}$	$V_{CB}=100\text{V}, I_E=0$			200	$\mu\text{A}$
Base cut-off current	$I_{CEO}$	$V_{CE}=60\text{V}, I_B=0$			300	$\mu\text{A}$
Emitter cut-off current	$I_{EBO}$	$V_{EB}=5\text{V}, I_C=0$			1	mA
DC current gain	$h_{FE(1)}^*$	$V_{CE}=4\text{V}, I_C=1\text{A}$	25			
	$h_{FE(2)}^*$	$V_{CE}=4\text{V}, I_C=3\text{A}$	10		100	
Collector-emitter saturation voltage	$V_{CE(sat)}^*$	$I_C=3.0\text{A}, I_B=375\text{mA}$			1.2	V
Base-emitter voltage	$V_{BE}^*$	$V_{CE}=4\text{V}, I_C=3\text{A}$			1.8	V
Transition frequency	$f_T$	$V_{CE}=10\text{V}, I_C=500\text{mA}, f=1\text{MHz}$	3			MHz

\* Pulsed , 2%D.C.

## Typical Characteristics

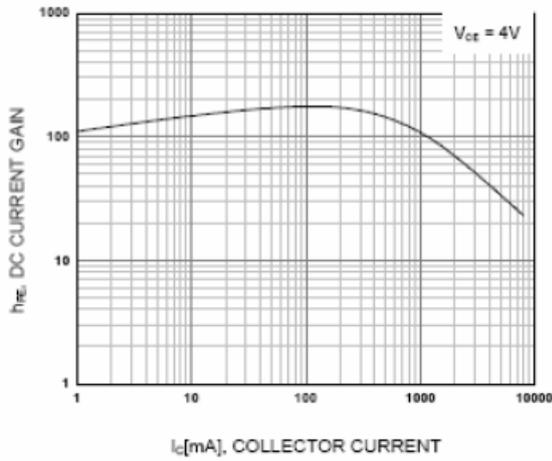


Figure 1. DC current Gain

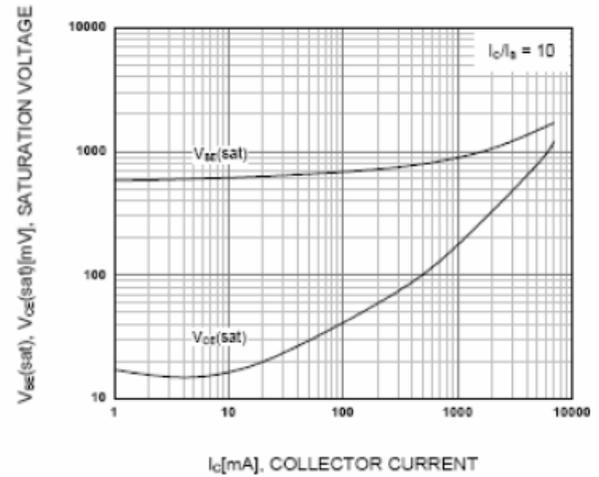


Figure 2. Base-Emitter Saturation Voltage  
Collector-Emitter Saturation Voltage

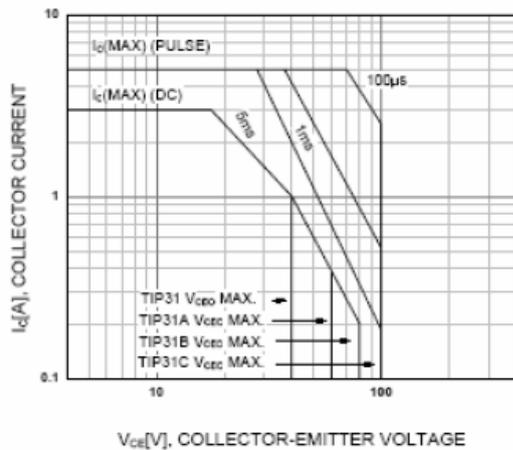


Figure 3. Safe Operating Area

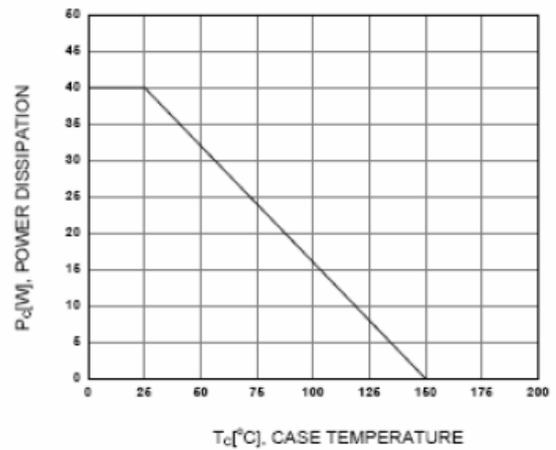


Figure 4. Power Derating