

CMRD6263DO

**SURFACE MOUNT
DUAL, ISOLATED, OPPOSING
SILICON SCHOTTKY DIODES**

ATTOmini™



SOT-963 CASE

Central
Semiconductor Corp.

www.centrasemi.com

DESCRIPTION:

The CENTRAL SEMICONDUCTOR CMRD6263DO are Dual, Isolated, Opposing high quality Schottky Diodes designed for applications where very small size and operational efficiency are prime requirements.

MARKING CODE: CX

FEATURES:

- Current ($I_F=15\text{mA}$)
- $V_{RRM}=70\text{V}$
- Low Forward Voltage Drop ($V_F=0.395\text{V TYP @ }1.0\text{mA}$)
- Low Reverse Current (98nA TYP @ 50V)
- Extremely Fast Switching (5.0ns MAX)

APPLICATIONS:

- DC/DC Converters
- Voltage Clamping
- Protection Circuits
- Battery Powered Portable Devices

MAXIMUM RATINGS: ($T_A=25^\circ\text{C}$)

Peak Repetitive Reverse Voltage
Continuous Forward Current
Peak Forward Surge Current, $t_p=1.0\text{s}$
Power Dissipation
Operating and Storage Junction Temperature
Thermal Resistance

SYMBOL

SYMBOL		UNITS
V_{RRM}	70	V
I_F	15	mA
I_{FSM}	50	mA
P_D	125	mW
T_J, T_{stg}	-65 to +150	$^\circ\text{C}$
θ_{JA}	1000	$^\circ\text{C/W}$

ELECTRICAL CHARACTERISTICS PER DIODE: ($T_A=25^\circ\text{C}$ unless otherwise noted)

SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNITS
I_R	$V_R=50\text{V}$		98	200	nA
BV_R	$I_R=10\mu\text{A}$	70			V
V_F	$I_F=1.0\text{mA}$		0.395	0.41	V
C_T	$V_R=0, f=1.0\text{MHz}$			2.0	pF
t_{rr}	$I_F=I_R=10\text{mA}, I_{rr}=1.0\text{mA}, R_L=100\Omega$			5.0	ns


R1 (8-February 2010)

CMRD6263DO

**SURFACE MOUNT
DUAL, ISOLATED, OPPOSING
SILICON SCHOTTKY DIODES**




SOT-963 CASE - MECHANICAL OUTLINE

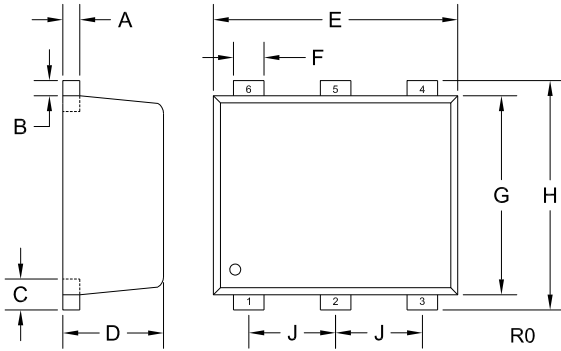

SYMBOL	DIMENSIONS		DIMENSIONS	
	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.002	0.006	0.050	0.150
B	0.002	0.006	0.050	0.150
C	0.005	0.007	0.125	0.175
D	0.016	0.020	0.400	0.500
E	0.037	0.041	0.950	1.050
F	0.004	0.008	0.100	0.200
G	0.030	0.033	0.750	0.850
H	0.037	0.041	0.950	1.050
J	0.014		0.350	

SOT-963 (REV: R0)

PIN CONFIGURATION




LEAD CODE:

- 1) Anode D1
- 2) NC
- 3) Cathode D2
- 4) Anode D2
- 5) NC
- 6) Cathode D1

MARKING CODE: CX

SUGGESTED MOUNTING PAD CONFIGURATIONS

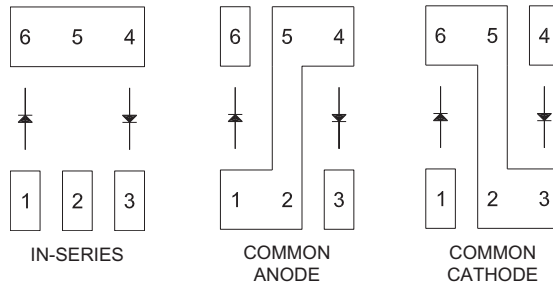

Note:
Two devices easily configurable
as a bridge rectifier.






R1 (8-February 2010)

CMRD6263DO

**SURFACE MOUNT
DUAL, ISOLATED, OPPOSING
SILICON SCHOTTKY DIODES**



TYPICAL ELECTRICAL CHARACTERISTICS

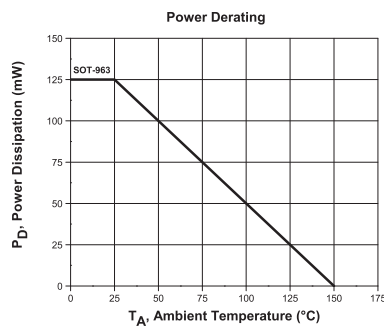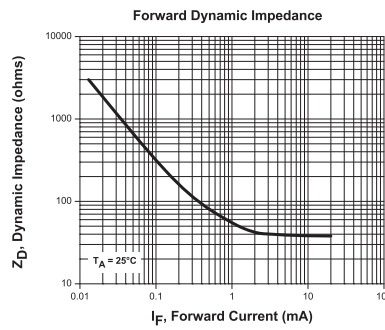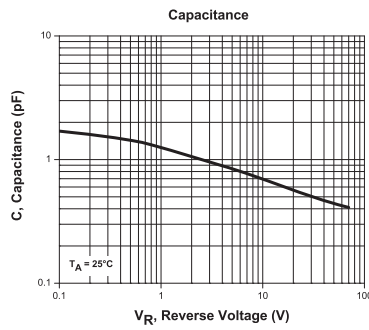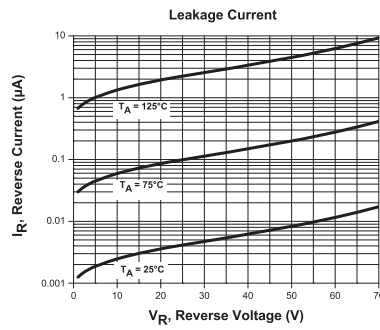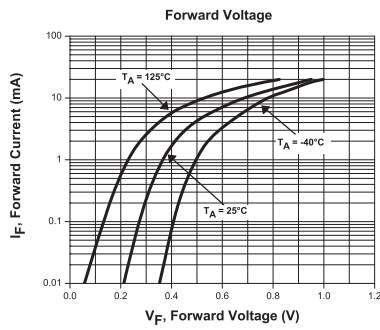

R1 (8-February 2010)