


CRSH3 SERIES
SILICON SCHOTTKY RECTIFIER
3 AMP, 20 THRU 100 VOLTS



www.centrasemi.com

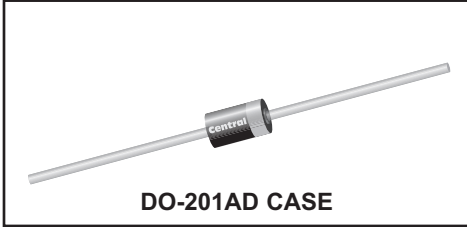

DESCRIPTION:

The CENTRAL SEMICONDUCTOR CRSH3 series types are 3.0 amp glass passivated silicon Schottky rectifiers mounted in an axial-lead epoxy case using a metal-to-silicon junction to yield low forward voltage drops and instantaneous reverse recovery time.

MARKING: FULL PART NUMBER

MAXIMUM RATINGS: ($T_A=25^\circ\text{C}$ unless otherwise noted)

	SYMBOL	CRSH3							UNITS
		-2	-3	-4	-5	-6	-8	-10	
Peak Repetitive Reverse Voltage	V_{RRM}	20	30	40	50	60	80	100	V
DC Blocking Voltage	V_R	20	30	40	50	60	80	100	V
RMS Reverse Voltage	$V_{R(RMS)}$	14	21	28	35	42	56	70	V
Average Forward Current	I_O				3.0				A
Peak Forward Surge Current (tp=8.3ms)	I_{FSM}				80				A
Operating Junction Temperature	T_J				-65 to +125				$^\circ\text{C}$
Storage Temperature	T_{stg}				-65 to +150				$^\circ\text{C}$
Thermal Resistance	θ_{JL}				20				$^\circ\text{C/W}$


ELECTRICAL CHARACTERISTICS: ($T_A=25^\circ\text{C}$ unless otherwise noted)

SYMBOL	TEST CONDITIONS	TYP	MAX	UNITS
I_R	V_R =Rated V_{RRM}		0.5	mA
I_R	V_R =Rated V_{RRM} , $T_A=100^\circ\text{C}$		30	mA
V_F	$I_F=3.0\text{A}$ (20V, 30V, 40V)		0.55	V
V_F	$I_F=3.0\text{A}$ (50V, 60V)		0.75	V
V_F	$I_F=3.0\text{A}$ (80V, 100V)		0.85	V
C_J	$V_R=4.0\text{V}$, $f=1.0\text{MHz}$	250		pF

CRSH3 SERIES
 SILICON SCHOTTKY RECTIFIER
 3 AMP, 20 THRU 100 VOLTS



DO-201AD CASE - MECHANICAL OUTLINE

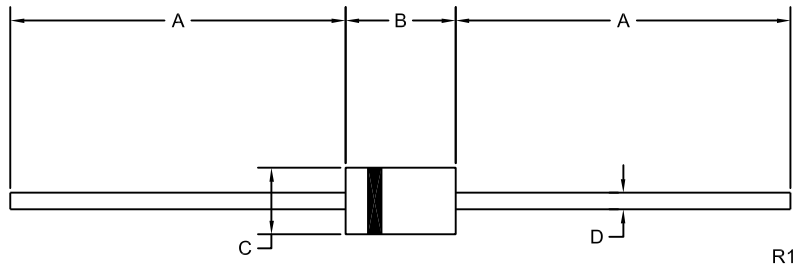

SYMBOL	DIMENSIONS			
	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	1.000	-	25.40	-
B	0.283	0.375	7.20	9.53
C	0.189	0.210	4.80	5.33
D	0.047	0.052	1.20	1.32

DO-201AD (REV: R1)

MARKING: FULL PART NUMBER

R2 (18-June 2012)