

CTL SH10-45L

**SURFACE MOUNT
LOW VF
SILICON SCHOTTKY RECTIFIER**



www.centralsemi.com

DESCRIPTION:

The CENTRAL SEMICONDUCTOR CTL SH10-45L is a high performance 10 amp silicon Schottky rectifier designed for applications as a by-pass diode in low profile solar panels.

MARKING CODE: CSH1045L



APPLICATIONS:

- Solar by-pass diode
- OR-ing diode
- DC-DC output rectification
- Reverse polarity protection
- Power management

MAXIMUM RATINGS: ($T_A=25^\circ\text{C}$)

Peak Repetitive Reverse Voltage

DC Blocking Voltage

RMS Reverse Voltage

Average Forward Current ($T_L=110^\circ\text{C}$)

Peak Forward Surge Current, $t_p=8.3\text{ms}$

Operating and Storage Junction Temperature

Thermal Resistance (Note 1)

Thermal Resistance (Note 1)

FEATURES:

- Low forward voltage, $V_F=0.47\text{V MAX} @ 10\text{A}$
- Low reverse leakage current, $I_R=0.25\text{mA MAX} @ 45\text{V}$
- Low profile 1.2mm MAX package height

SYMBOL		UNITS
V_{RRM}	45	V
V_R	45	V
$V_{R(RMS)}$	32	V
I_O	10	A
I_{FSM}	275	A
T_J, T_{stg}	-55 to +150	$^\circ\text{C}$
Θ_{JA}	60	$^\circ\text{C/W}$
Θ_{JL}	8.0	$^\circ\text{C/W}$

ELECTRICAL CHARACTERISTICS: ($T_A=25^\circ\text{C}$ unless otherwise noted)

SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNITS
I_R	$V_R=45\text{V}$		0.1	0.25	mA
I_R	$V_R=45\text{V}, T_A=125^\circ\text{C}$		15		mA
BV_R	$I_R=0.5\text{mA}$	45			V
V_F	$I_F=5.0\text{A}$		0.38		V
V_F	$I_F=5.0\text{A}, T_A=125^\circ\text{C}$		0.32		V
V_F	$I_F=10\text{A}$		0.44	0.47	V
V_F	$I_F=10\text{A}, T_A=125^\circ\text{C}$		0.41		V
C_J	$V_R=10\text{V}, f=1.0\text{MHz}$		400		pF

Notes: (1) FR-4 epoxy PCB with minimum copper pad area.


R1 (16-July 2012)

CTLH10-45L


**SURFACE MOUNT
LOW V_F
SILICON SCHOTTKY RECTIFIER**




TLM364 CASE - MECHANICAL OUTLINE

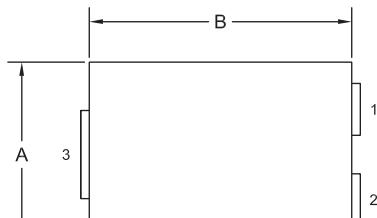

TOP VIEW

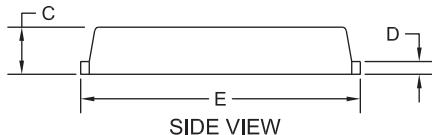

SIDE VIEW

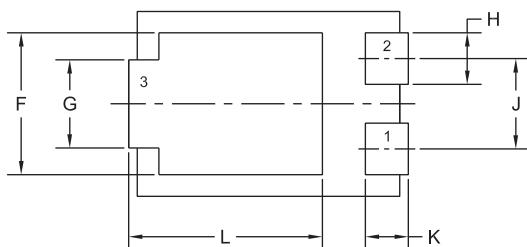


BOTTOM VIEW

SYMBOL	DIMENSIONS			
	INCHES	MILLIMETERS	MIN	MAX
A	0.167	4.25	0.172	4.35
B	0.238	6.05	0.243	6.15
C	0.039	1.00	0.048	1.20
D	0.009	0.25	0.014	0.35
E	0.250	6.35	0.262	6.65
F	0.128	3.25	0.136	3.45
G	0.076	1.95	0.085	2.15
H	0.044	1.10	0.052	1.30
J	0.083	2.10		
K	0.035	0.90	0.044	1.10
L	0.171	4.35	0.183	4.65

TLM364 (REV:R0)

SUGGESTED MOUNTING PADS
(Dimensions in mm)

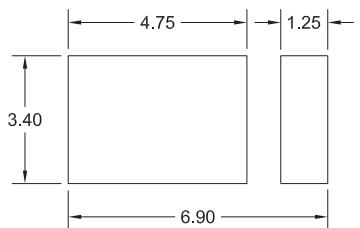

R0

LEAD CODE:

- 1) Anode
- 2) Anode
- 3) Cathode

MARKING CODE: CSH1045L

R1 (16-July 2012)