

CMLD3003DO
CMLD3003DOG

SURFACE MOUNT SILICON
DUAL, ISOLATED, OPPOSING
LOW LEAKAGE
SWITCHING DIODES



SOT-563 CASE



www.centralsemi.com

DESCRIPTION:

The CENTRAL SEMICONDUCTOR CMLD3003DO and CMLD3003DOG devices contain two (2) isolated opposing configuration, silicon switching diodes, manufactured by the epitaxial planar process, epoxy molded in an SOT-563 surface mount package. These devices are designed for switching applications requiring extremely low leakage.

MARKING CODES:

CMLD3003DO: C30

CMLD3003DOG: 3CG

• The CMLD3003DOG is *Halogen Free* by design

MAXIMUM RATINGS: ($T_A=25^\circ\text{C}$)

	SYMBOL	UNITS
Continuous Reverse Voltage	V_R	V
Average Rectified Current	I_O	mA
Continuous Forward Current	I_F	mA
Peak Repetitive Forward Current	I_{FRM}	mA
Peak Forward Surge Current, $t_p=1.0\mu\text{s}$	I_{FSM}	A
Peak Forward Surge Current, $t_p=1.0\text{s}$	I_{FSM}	A
Power Dissipation	P_D	mW
Operating and Storage Junction Temperature	T_J, T_{stg}	$^\circ\text{C}$
Thermal Resistance	Θ_{JA}	$^\circ\text{C}/\text{W}$

ELECTRICAL CHARACTERISTICS PER DIODE: ($T_A=25^\circ\text{C}$ unless otherwise noted)


SYMBOL	TEST CONDITIONS	MIN	MAX	UNITS
I_R	$V_R=125\text{V}$		1.0	nA
I_R	$V_R=125\text{V}, T_A=150^\circ\text{C}$		3.0	μA
I_R	$V_R=180\text{V}$		10	nA
I_R	$V_R=180\text{V}, T_A=150^\circ\text{C}$		5.0	μA
BV_R	$I_R=5.0\mu\text{A}$	200		V
V_F	$I_F=1.0\text{mA}$	0.62	0.72	V
V_F	$I_F=10\text{mA}$	0.72	0.83	V
V_F	$I_F=50\text{mA}$	0.80	0.89	V
V_F	$I_F=100\text{mA}$	0.83	0.93	V
V_F	$I_F=200\text{mA}$	0.87	1.10	V
V_F	$I_F=300\text{mA}$	0.90	1.15	V
C_J	$V_R=0, f=1.0\text{MHz}$		4.0	pF

CMLD3003DO
CMLD3003DOG


SURFACE MOUNT SILICON
DUAL, ISOLATED, OPPOSING
LOW LEAKAGE
SWITCHING DIODES



SOT-563 CASE - MECHANICAL OUTLINE

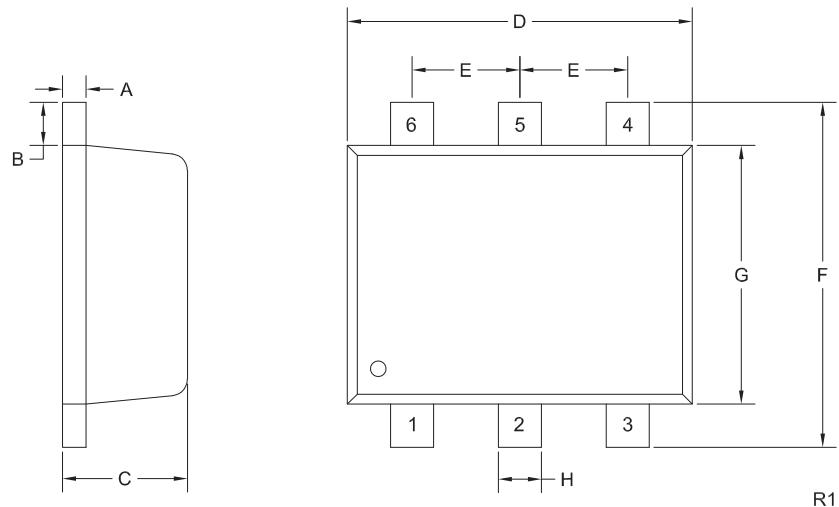

PIN CONFIGURATION

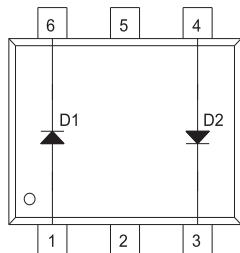

LEAD CODE:

- 1) Anode D1
- 2) NC
- 3) Cathode D2
- 4) Anode D2
- 5) NC
- 6) Cathode D1

DIMENSIONS

SYMBOL	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.0027	0.007	0.07	0.18
B	0.008		0.20	
C	0.017	0.024	0.45	0.60
D	0.059	0.067	1.50	1.70
E	0.020		0.50	
F	0.061	0.067	1.55	1.70
G	0.045	0.049	1.15	1.25
H	0.006	0.012	0.15	0.30

SOT-563 (REV: R1)

MARKING CODES:

CMLD3003DO: C30
CMLD3003DOG: 3CG

R3 (3-February 2014)