



# CHENMKO ENTERPRISE CO.,LTD

Halogens free devices

## SURFACE MOUNT

### SCHOTTKY BARRIER RECTIFIER

VOLTAGE RANGE 40 Volts CURRENT 3.0 Amperes

SCM34LHGP

#### FEATURES

- \* Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- \* For surface mounted applications
- \* Low profile package
- \* Built-in strain relief
- \* Metal silicon junction, majority carrier conduction
- \* Low power loss, high efficiency
- \* High current capability, low forward voltage drop
- \* High surge capability
- \* For use in low voltage high frequency inverters, free wheeling, and polarity protection applications
- \* High temperature soldering guaranteed : 260°C/10 seconds at terminals


#### MECHANICAL DATA

**Case:** JEDEC SMC-S molded plastic

**Terminals:** Solder plated, solderable per MIL-STD-750, Method 2026

**Polarity:** Color band denotes cathode end

**Weight:** 0.007 ounce 0.25 gram

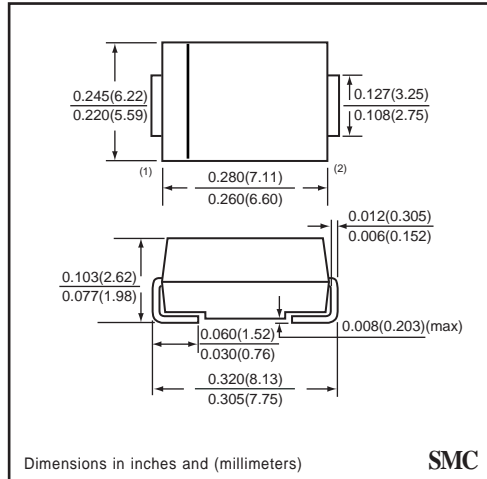

#### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.  
Single phase, half wave, 60 Hz, resistive or inductive load.  
For capacitive load, derate current by 20%.

#### MAXIMUM RATINGS ( At TA = 25°C unless otherwise noted )

RATINGS	SYMBOL	SCM34LHGP	UNITS
Maximum Recurrent Peak Reverse Voltage	V <sub>RRM</sub>	40	Volts
Maximum RMS Voltage	V <sub>RMS</sub>	28	Volts
Maximum DC Blocking Voltage	V <sub>DC</sub>	40	Volts
Maximum Average Forward Rectified Current	I <sub>O</sub>	3.0	Amps
Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	I <sub>FSM</sub>	100	Amps
Typical Junction Capacitance (Note 2)	C <sub>J</sub>	250	pF
Typical Thermal Resistance (Note 1)	R <sub>θJL</sub>	15	°C / W
Operating and Storage Temperature Range	T <sub>J</sub> , T <sub>STG</sub>	-65 to +125	°C

#### ELECTRICAL CHARACTERISTICS ( At TA = 25°C unless otherwise noted )

CHARACTERISTICS	SYMBOL	SCM34LHGP	UNITS
Maximum Instantaneous Forward Voltage	@ I <sub>F</sub> = 1.0A	0.37	Volts
	@ I <sub>F</sub> = 3.0A	0.48	Volts
Maximum Average Reverse Current at Rated DC Blocking Voltage	@ T <sub>A</sub> = 25°C	1.0	mAmps
	@ T <sub>A</sub> = 100°C	40	mAmps

NOTES : 1. Thermal Resistance ( Junction to Lead ) : PC Board Mounted on 0.55 X 0.55" ( 14 X 14mm ) copper pad area.  
2. Measured at 1.0 MHz and applied reverse voltage of 4.0 volts.

# RATING CHARACTERISTIC CURVES ( SCM34LHGP )

FIG. 1 - TYPICAL FORWARD CURRENT DERATING CURVE

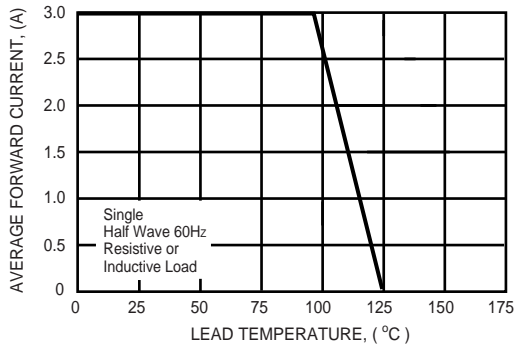


FIG. 2 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

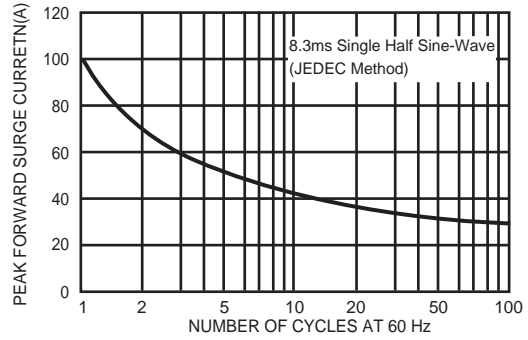


FIG. 3 - TYPICAL REVERSE CHARACTERISTICS

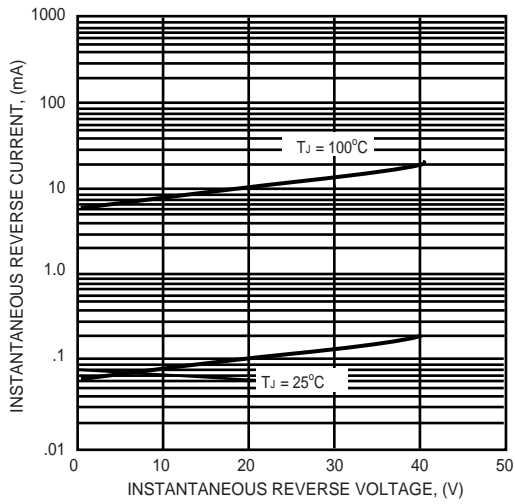


FIG. 4 - INSTANTANEOUS FORWARD CURRENT, (A)

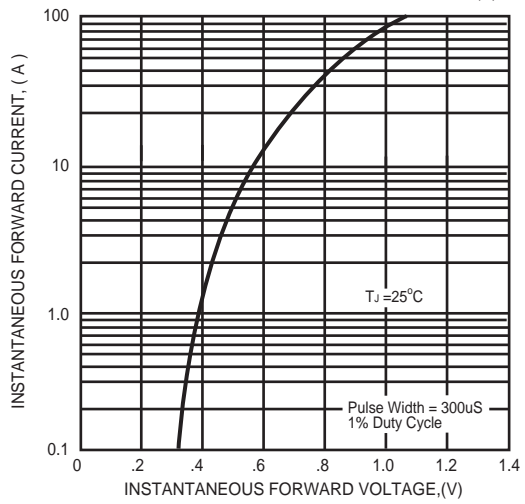


FIG. 5 - TYPICAL JUNCTION CAPACITANCE

