



**CHENMKO ENTERPRISE CO.,LTD**

Halogens free devices

### SURFACE MOUNT

SCHOTTKY BARRIER RECTIFIER

VOLTAGE RANGE 70 - 100 Volts CURRENT 1.0 Ampere

**SSM17GP**

**THRU**

**SSM110GP**

#### FEATURES

- \* Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- \* For surface mounted applications
- \* Low profile package
- \* Built-in strain relief
- \* Metal silicon junction, majority carrier conduction
- \* Low power loss, high efficiency
- \* High current capability, low forward voltage drop
- \* High surge capability
- \* For use in low voltage high frequency inverters, free wheeling, and polarity protection applications
- \* High temperature soldering guaranteed : 260°C/10 seconds at terminals

#### MECHANICAL DATA

**Case:** JEDEC SMA molded plastic

**Terminals:** Solder plated, solderable per MIL-STD-750, Method 2026

**Polarity:** Color band denotes cathode end

**Weight:** 0.002 ounce 0.064 gram

#### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS


Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%.



**SMA**

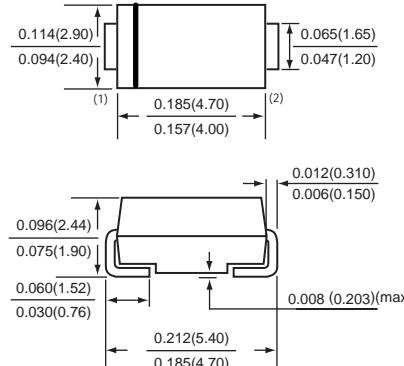

Dimensions in inches and (millimeters)

**SMA**

**MAXIMUM RATINGS ( At TA = 25°C unless otherwise noted )**

RATINGS	SYMBOL	SSM17GP	SSM18GP	SSM19GP	SSM110GP	UNITS
Maximum Recurrent Peak Reverse Voltage	V <sub>RRM</sub>	70	80	90	100	Volts
Maximum RMS Voltage	V <sub>RMS</sub>	49	56	63	70	Volts
Maximum DC Blocking Voltage	V <sub>D</sub> C	70	80	90	100	Volts
Maximum Average Forward Rectified Current	I <sub>O</sub>			1.0		Amps
Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	I <sub>FSM</sub>			40		Amps
Typical Junction Capacitance (Note 2)	C <sub>J</sub>			110		pF
Typical Thermal Resistance (Note 1)	R <sub>θ</sub> JL			25		°C / W
Operating and Storage Temperature Range	T <sub>J,TSTG</sub>			-65 to +150		°C

**ELECTRICAL CHARACTERISTICS ( At TA = 25°C unless otherwise noted )**

CHARACTERISTICS	SYMBOL	SSM17GP	SSM18GP	SSM19GP	SSM110GP	UNITS
Maximum Instantaneous Forward Voltage at 1.0 A DC	V <sub>F</sub>	0.75		0.80		Volts
Maximum Average Reverse Current @ TA = 25°C	I <sub>R</sub>			0.5		mAmps
at Rated DC Blocking Voltage @ TA = 100°C				10		mAmps

NOTES : 1. Thermal Resistance ( Junction to Lead ) : PC Board Mounted on 0.2 X 0.2" ( 5 X 5mm ) copper pad area.

2. Measured at 1.0 MHz and applied reverse voltage of 4.0 volts.

2002-5

## RATING CHARACTERISTIC CURVES ( SSM17GP THRU SSM110GP )

FIG. 1 - TYPICAL FORWARD CURRENT DERATING CURVE

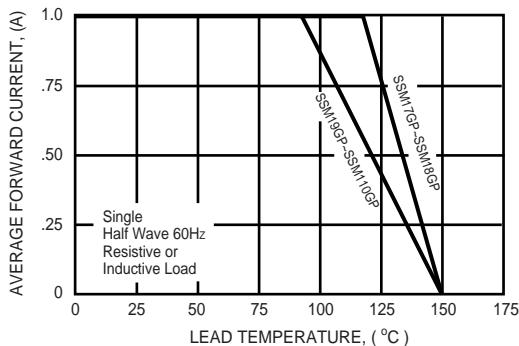


FIG. 3 - TYPICAL REVERSE CHARACTERISTICS

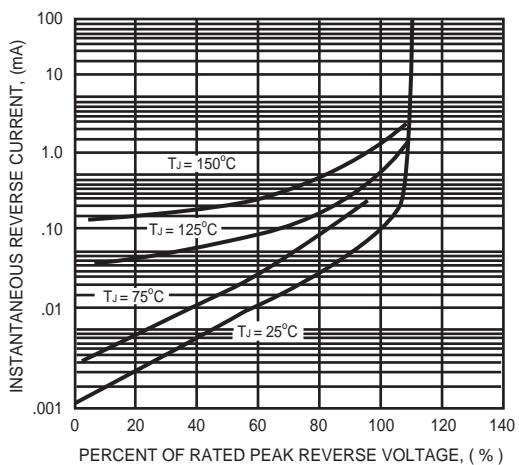


FIG. 2 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

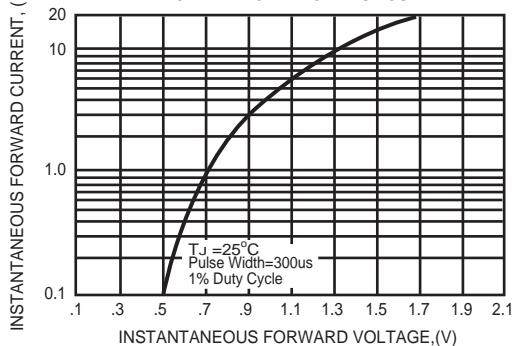


FIG. 4 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

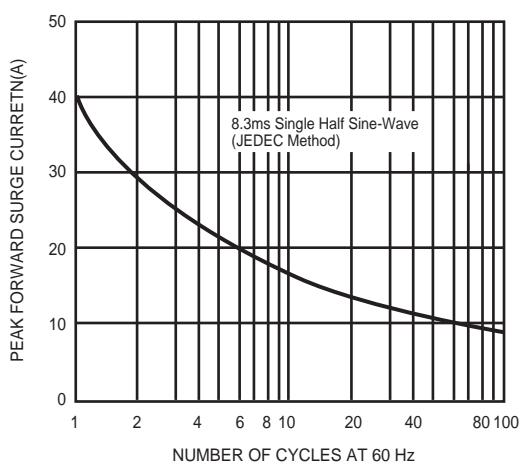


FIG. 5 - TYPICAL JUNCTION CAPACITANCE

