

Halogen free devices

CHENMKO ENTERPRISE CO.,LTD

SURFACE MOUNT

SCHOTTKY BARRIER RECTIFIER

VOLTAGE RANGE 20 - 60 Volts CURRENT 5.0 Amperes

SSM52GP

THRU

SSM56GP

FEATURES

- * Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- * For surface mounted applications
- * Low profile package
- * Built-in strain relief
- * Metal silicon junction, majority carrier conduction
- * Low power loss, high efficiency
- * High current capability, low forward voltage drop
- * High surge capability
- * For use in low voltage high frequency inverters, free wheeling, and polarity protection applications
- * High temperature soldering guaranteed : 260°C/10 seconds at terminals

MECHANICAL DATA

Case: JEDEC SMB molded plastic

Terminals: Solder plated, solderable per MIL-STD-750, Method 2026

Polarity: Color band denotes cathode end

Weight: 0.003 ounce 0.093 gram

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS


Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%.



SMA

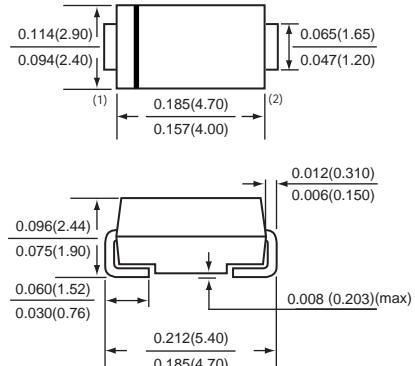

Dimensions in inches and (millimeters)

SMA

MAXIMUM RATINGS (At TA = 25°C unless otherwise noted)

RATINGS	SYMBOL	SSM52GP	SSM53GP	SSM54GP	SSM55GP	SSM56GP	UNITS
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	20	30	40	50	60	Volts
Maximum RMS Voltage	V _{RMS}	14	21	28	35	42	Volts
Maximum DC Blocking Voltage	V _D C	20	30	40	50	60	Volts
Maximum Average Forward Rectified Current	I _O				5.0		Amps
Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	I _{FSM}				125		Amps
Typical Junction Capacitance (Note 2)	C _J				300		pF
Typical Thermal Resistance (Note 1)	R _θ JL				12		°C / W
Operating and Storage Temperature Range	T _J , T _{STG}				-65 to +125		°C

ELECTRICAL CHARACTERISTICS (At TA = 25°C unless otherwise noted)

CHARACTERISTICS	SYMBOL	SSM52GP	SSM53GP	SSM54GP	SSM55GP	SSM56GP	UNITS
Maximum Instantaneous Forward Voltage at 5.0 A DC	V _F		0.55		0.70		Volts
Maximum Average Reverse Current @ TA = 25°C	I _R			0.5			mAmps
at Rated DC Blocking Voltage @ TA = 100°C				20			mAmps

NOTES : 1. Thermal Resistance (Junction to Lead) : PC Board Mounted on 0.55 X 0.55" (14 X 14mm) copper pad area.
2. Measured at 1.0 MHz and applied reverse voltage of 4.0 volts.

2007-4

RATING CHARACTERISTIC CURVES (SSM52GP THRU SSM56GP)

FIG. 1 - TYPICAL FORWARD CURRENT DERATING CURVE

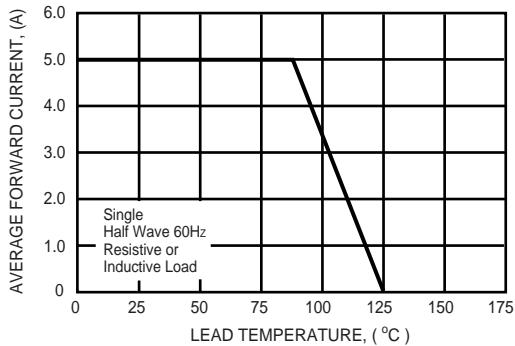


FIG. 2 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

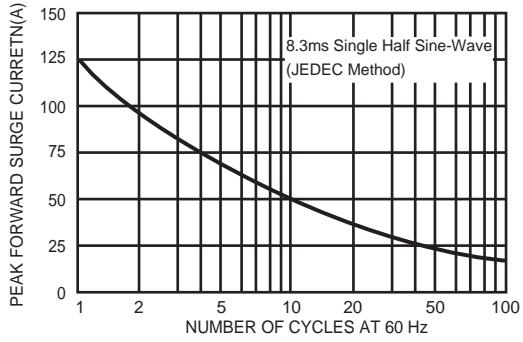


FIG. 3 - TYPICAL REVERSE CHARACTERISTICS

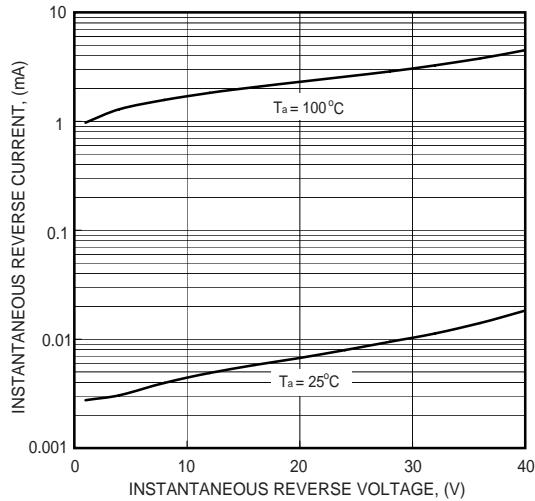


FIG. 4 - INSTANTANEOUS FORWARD CURRENT, (A)

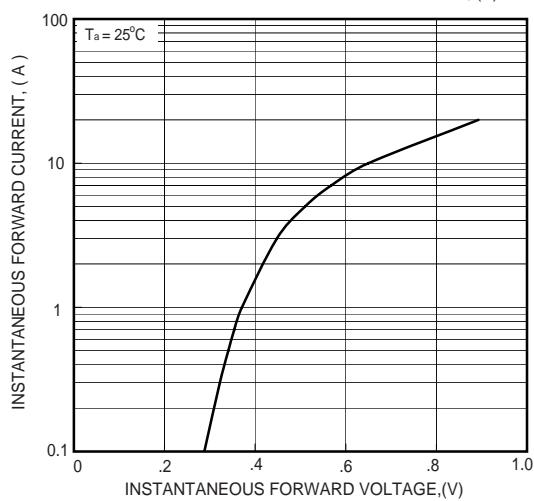


FIG. 5 - TYPICAL JUNCTION CAPACITANCE

