



SURFACE MOUNT RECTIFIER


VOLTAGE 400-1000 Volts CURRENT 1 Ampere


FEATURES

- For surface mounted applications in order to optimize board space
- Easy pick and place
- Plastic package has Underwriters Laboratory Flammability Classification 94V-O
- Low Forward Drop
- High temperature soldering : 260°C/10 seconds at terminals
- Glass Passivated Chip Junction
- Ultra Thin Profile Package for Space Constrained Utilization
- · Package suitable for automated handling
- Lead free in comply with EU RoHS 2011/65/EU directives.
- Green molding compound as per IEC61249 Std. . (Halogen Free)

MECHANICAL DATA

- Case: SMAF molded plastic
- Terminals: Solder plated, solderable per MIL-STD-750, Method 2026
- Polarity: Color band denotes cathode end
- Approx weight: 0.001 ounces, 0.0328 grams
- Marking: Part number



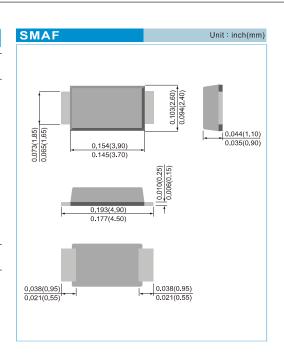

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS (TA=25°C unless otherwise noted)

PARAMETER	R	SYMBOL	GS1GF	GS1JF	GS1KF	GS1MF	UNITS
Recurrent Peak Reverse Voltage		V _{RRM}	400	600	800	1000	V
RMS Voltage		V _{RMS}	280	420	560	700	V
DC Blocking Voltage		V _R	400	600	800	1000	V
Average Forward Current		I _{F(AV)}	1				А
Peak Forward Surge Current : 8.3ms si superimposed on rated load	ngle half sine-wave	I _{FSM}	30			А	
Forward Voltage at 1A			1.1				V
DC Reverse Current at Rated DC Blocking Voltage	T _J =25°C	I _R	1			μА	
Typical Junction Capacitance	V _R =4V,1MHz	C J	7				pF
Typical Thermal Resistance ,Junction to Lead (Note 1) Junction to Ambient (Note 1)			20 83				°C / W
Operating Junction Temperature and Storage Temperature Range			-55 to +150				°C

NOTES: 1. Mounted on 48cm² FR-4 PCB.





RATING AND CHARACTERISTIC CURVES




Fig.1 Forward Current Derating Curve




Fig.2 Typical Junction Capacitance




Fig.3 Typical Reverse Characteristics





Fig.4 Typical Forward Characteristics





MOUNTING PAD LAYOUT

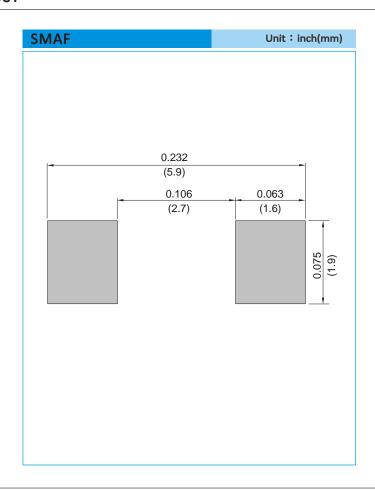

ORDER INFORMATION

• Packing information

T/R - 10K per 13" plastic Reel

T/R - 3K per 7" plastic Reel





Part No_packing code_Version

GS1GF_R1_00001 GS1GF_R2_00001

For example : RB500V-40_R2_00001 Part No. Serial number Version code means HF Packing size code means 13" Packing type means T/R

Packing Code XX				Version Code XXXXX				
Packing type	1 st Code	Packing size code	2 nd Code	HF or RoHS	1 st Code	2 nd ~5 th Code		
Tape and Ammunition Box (T/B)	Α	N/A	0	HF	0	serial number		
Tape and Reel (T/R)	R	7"	1	RoHS	1	serial number		
Bulk Packing (B/P)	В	13"	2					
Tube Packing (T/P)	Т	26mm	X					
Tape and Reel (Right Oriented) (TRR)	S	52mm	Y					
Tape and Reel (Left Oriented) (TRL)	L	PANASERT T/B CATHODE UP (PBCU)	U					
FORMING	F	PANASERT T/B CATHODE DOWN (PBCD)	D					





Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties
 of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation.
 Customers are responsible in comprehending the suitable use in particular applications.
 Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining.