



P-Channel Enhancement Mode Field Effect Transistor

PRODUCT SUMMARY		
V _{DSS}	I _D	R _{DS(ON)} (mΩ) Max
-55V	-24	42 @ V _{GS} = -10V
		55 @ V _{GS} = -4.5V

FEATURES

- Super high dense cell design for low R_{DS(ON)}.
- Rugged and reliable.
- TO-252 and TO-251 Package.



ABSOLUTE MAXIMUM RATINGS (T_A=25°C unless otherwise noted)

Parameter	Symbol	Limit	Unit
Drain-Source Voltage Rating	V _{spike} ^c	-60	V
Drain-Source Voltage	V _{DS}	-55	V
Gate-Source Voltage	V _{GS}	±20	V
Drain Current-Continuous @ T _C =25°C -Pulsed ^a	I _D	-24	A
	I _{DM}	-72	A
Drain-Source Diode Forward Current	I _S	-20	A
Maximum Power Dissipation @ T _C =25°C	P _D	50	W
Operating Junction and Storage Temperature Range	T _J , T _{STG}	-55 to 175	°C

THERMAL CHARACTERISTICS

Thermal Resistance, Junction-to-Case	R _{θJC}	3	°C/W
Thermal Resistance, Junction-to-Ambient	R _{θJA}	50	°C/W

STU/D2455PLS

ELECTRICAL CHARACTERISTICS (T_c=25 °C unless otherwise noted)

Parameter	Symbol	Condition	Min	Typ ^c	Max	Unit
OFF CHARACTERISTICS						
Drain-Source Breakdown Voltage	BV _{DSS}	V _{GS} = 0V, I _D = -250uA	-55			V
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} = -44V, V _{GS} = 0V			-1	uA
Gate-Body Leakage	I _{GSS}	V _{GS} = ±20V, V _{DS} = 0V			±100	nA
ON CHARACTERISTICS^a						
Gate Threshold Voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D = -250uA	-1	-1.7	-3	V
Drain-Source On-State Resistance	R _{DS(ON)}	V _{GS} = -10V, I _D = -10A		33	42	m ohm
		V _{GS} = -4.5V, I _D = -6A		42	55	m ohm
On-State Drain Current	I _{D(ON)}	V _{DS} = -10V, V _{GS} = -10V	-24			A
Forward Transconductance	g _{FS}	V _{DS} = -10V, I _D = -10A		16		S
DYNAMIC CHARACTERISTICS^b						
Input Capacitance	C _{ISS}	V _{DS} = -30V, V _{GS} = 0V f = 1.0MHz		1730		pF
Output Capacitance	C _{OSS}			185		pF
Reverse Transfer Capacitance	C _{RSS}			125		pF
Gate resistance	R _g	V _{GS} = 0V, V _{DS} = 0V, f = 1.0MHz		1.7		ohm
SWITCHING CHARACTERISTICS^b						
Turn-On Delay Time	t _{D(ON)}	V _{DD} = -30V I _D = -1 A V _{GS} = -10V R _{GEN} = 6 ohm		21		ns
Rise Time	t _r			25		ns
Turn-Off Delay Time	t _{D(OFF)}			127		ns
Fall Time	t _f			35		ns
Total Gate Charge (10V)	Q _g	V _{DS} = -30V, I _D = -10A V _{GS} = -10V		31		nC
Total Gate Charge (4.5V)				13.5		nC
Gate-Source Charge	Q _{gs}			3.5		nC
Gate-Drain Charge	Q _{gd}			7		nC

STU/D2455PLS

ELECTRICAL CHARACTERISTICS ($T_c=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Condition	Min	Typ	Max	Unit
DRAIN-SOURCE DIODE CHARACTERISTICS ^a						
Diode Forward Voltage	V_{SD}	$V_{GS} = 0V, I_s = -10A$		-0.92	-1.3	V

Notes

- a. Pulse Test: Pulse Width $\leq 300\mu s$, Duty Cycle $\leq 2\%$.
- b. Guaranteed by design, not subject to production testing.
- c. Guaranteed when external $R_g=6\ \text{ohm}$ and $t_f < t_f\ \text{max}$

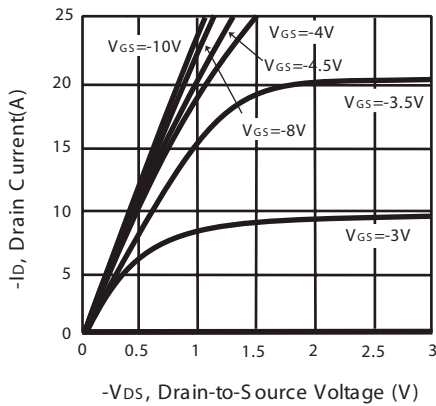


Figure 1. Output C characteristics

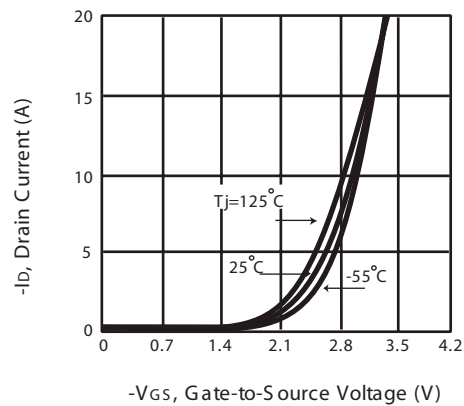


Figure 2. Transfer C characteristics

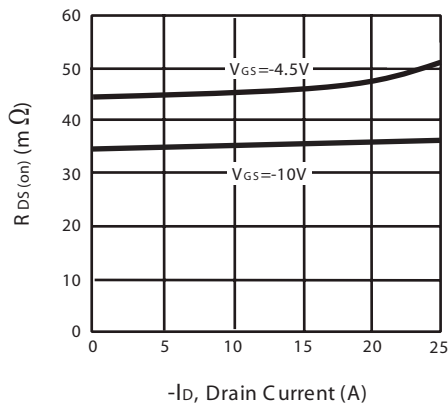


Figure 3. On-Resistance vs. Drain Current and Gate Voltage

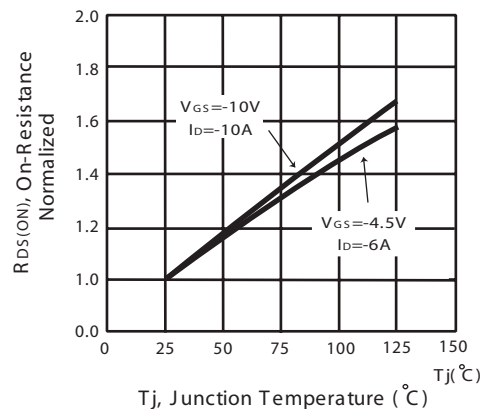


Figure 4. On-Resistance Variation with Drain Current and Temperature

STU/D2455PLS

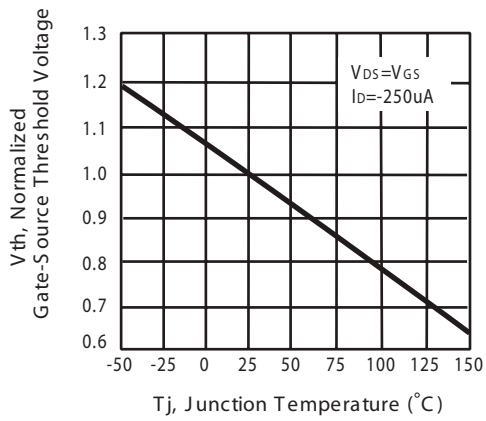


Figure 5. Gate Threshold Variation with Temperature

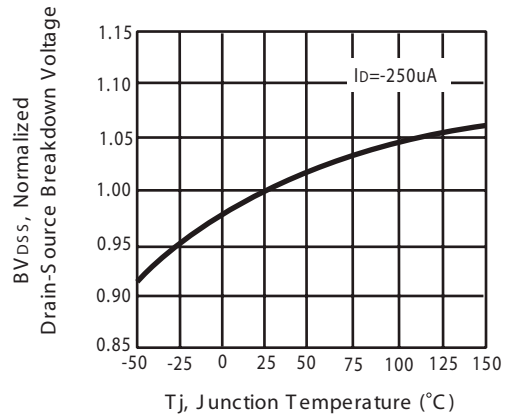


Figure 6. Breakdown Voltage Variation with Temperature

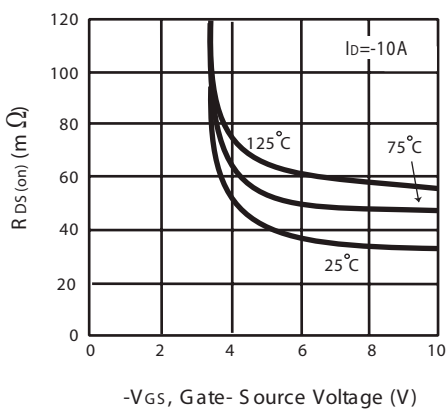


Figure 7. On-Resistance vs. Gate-Source Voltage

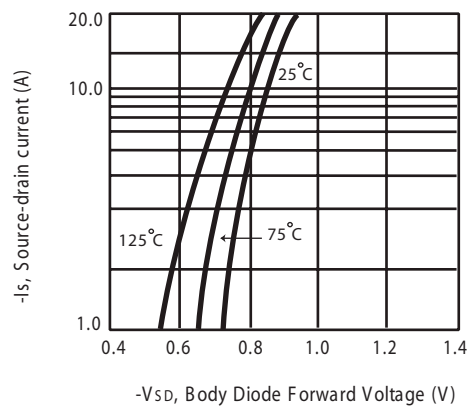


Figure 8. Body Diode Forward Voltage Variation with Source Current

STU/D2455PLS

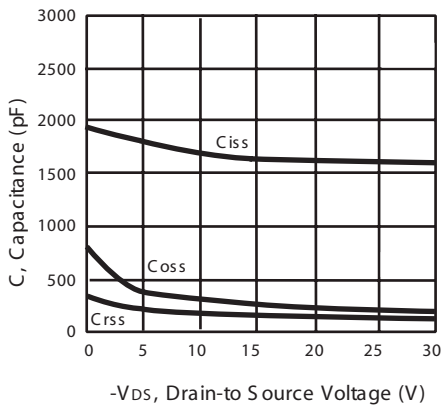


Figure 9. Capacitance

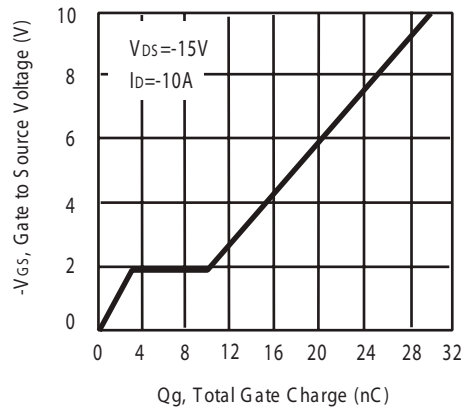


Figure 10. Gate Charge

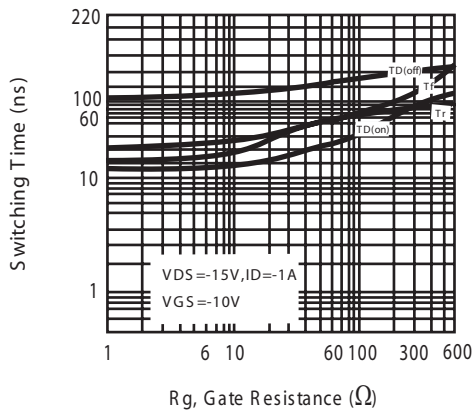


Figure 11. switching characteristics

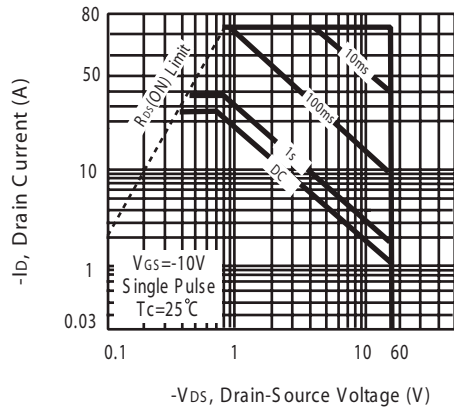


Figure 10. Maximum Safe Operating Area

STU/D2455PLS

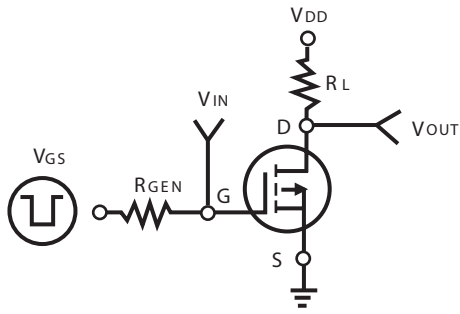


Figure 11. S switching Test Circuit

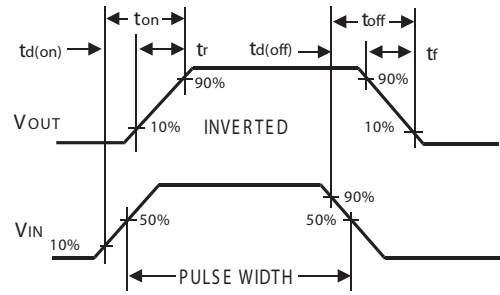


Figure 12. S switching Waveforms


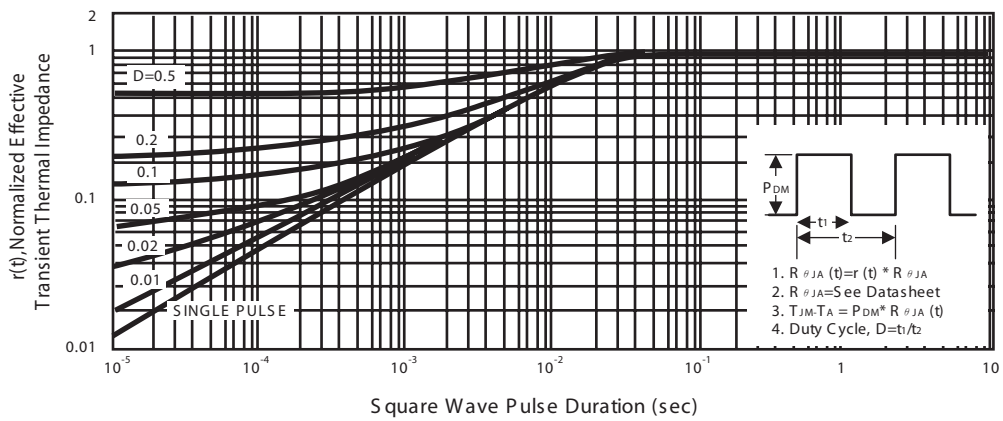


Figure 13. Normalized Thermal Transient Impedance Curve


STU/D2455PLS

PACKAGE OUTLINE DIMENSIONS

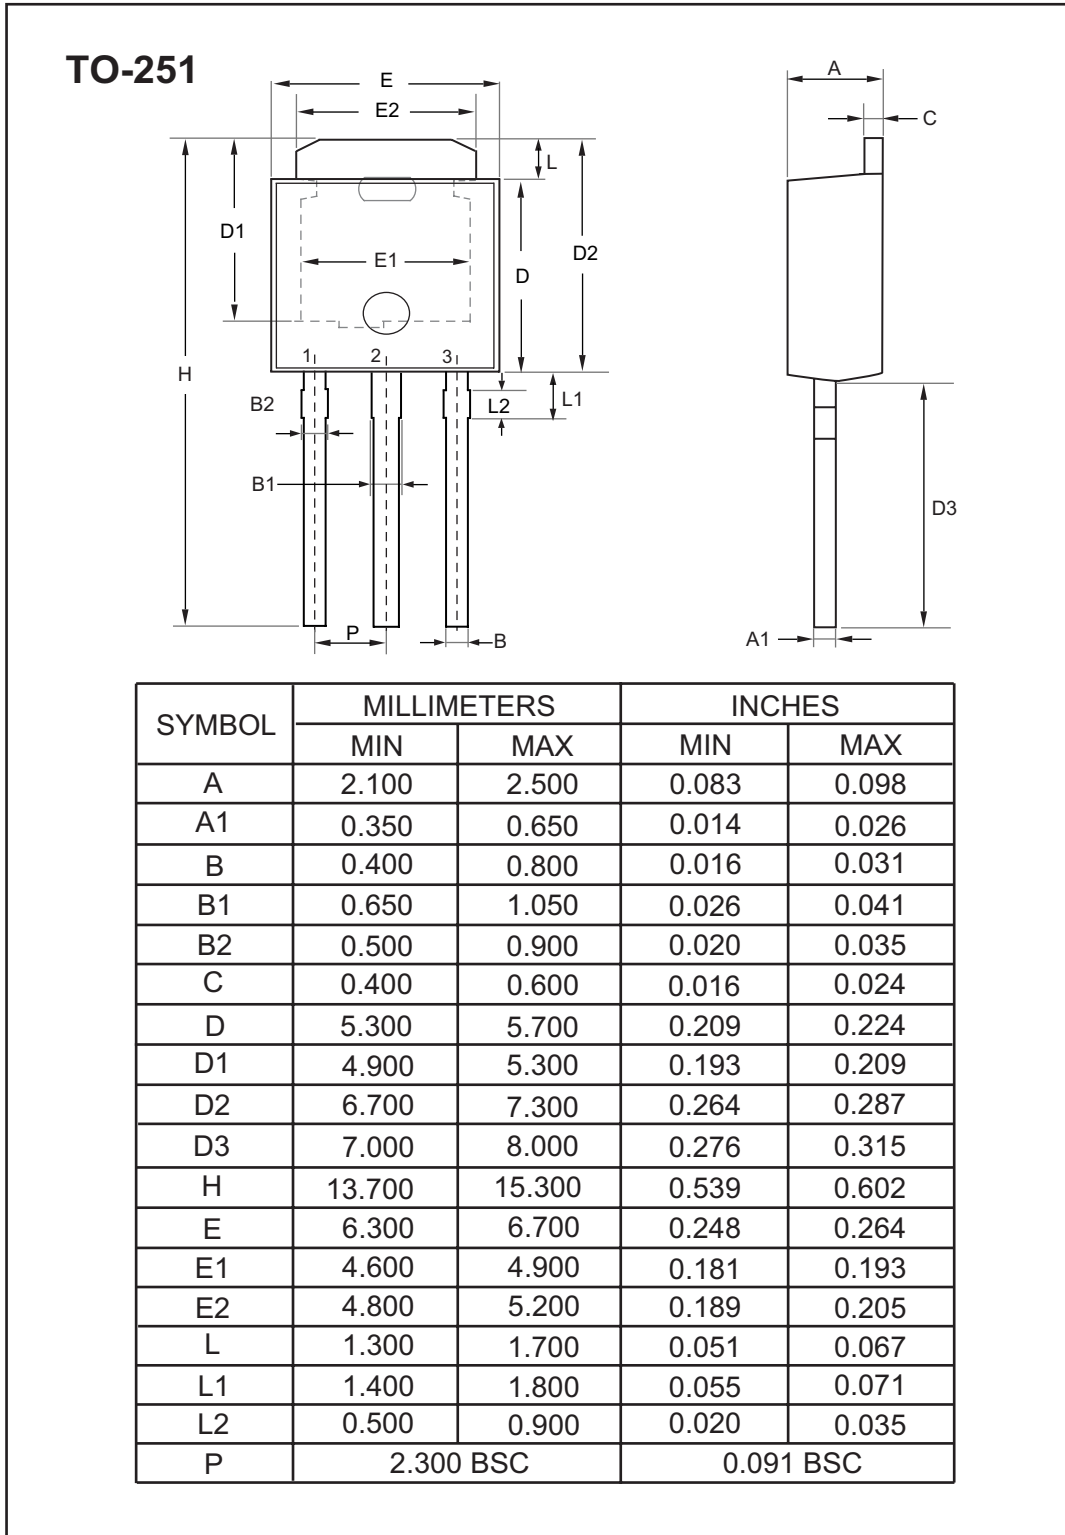

STU/D2455PLS


PACKAGE OUTLINE DIMENSIONS

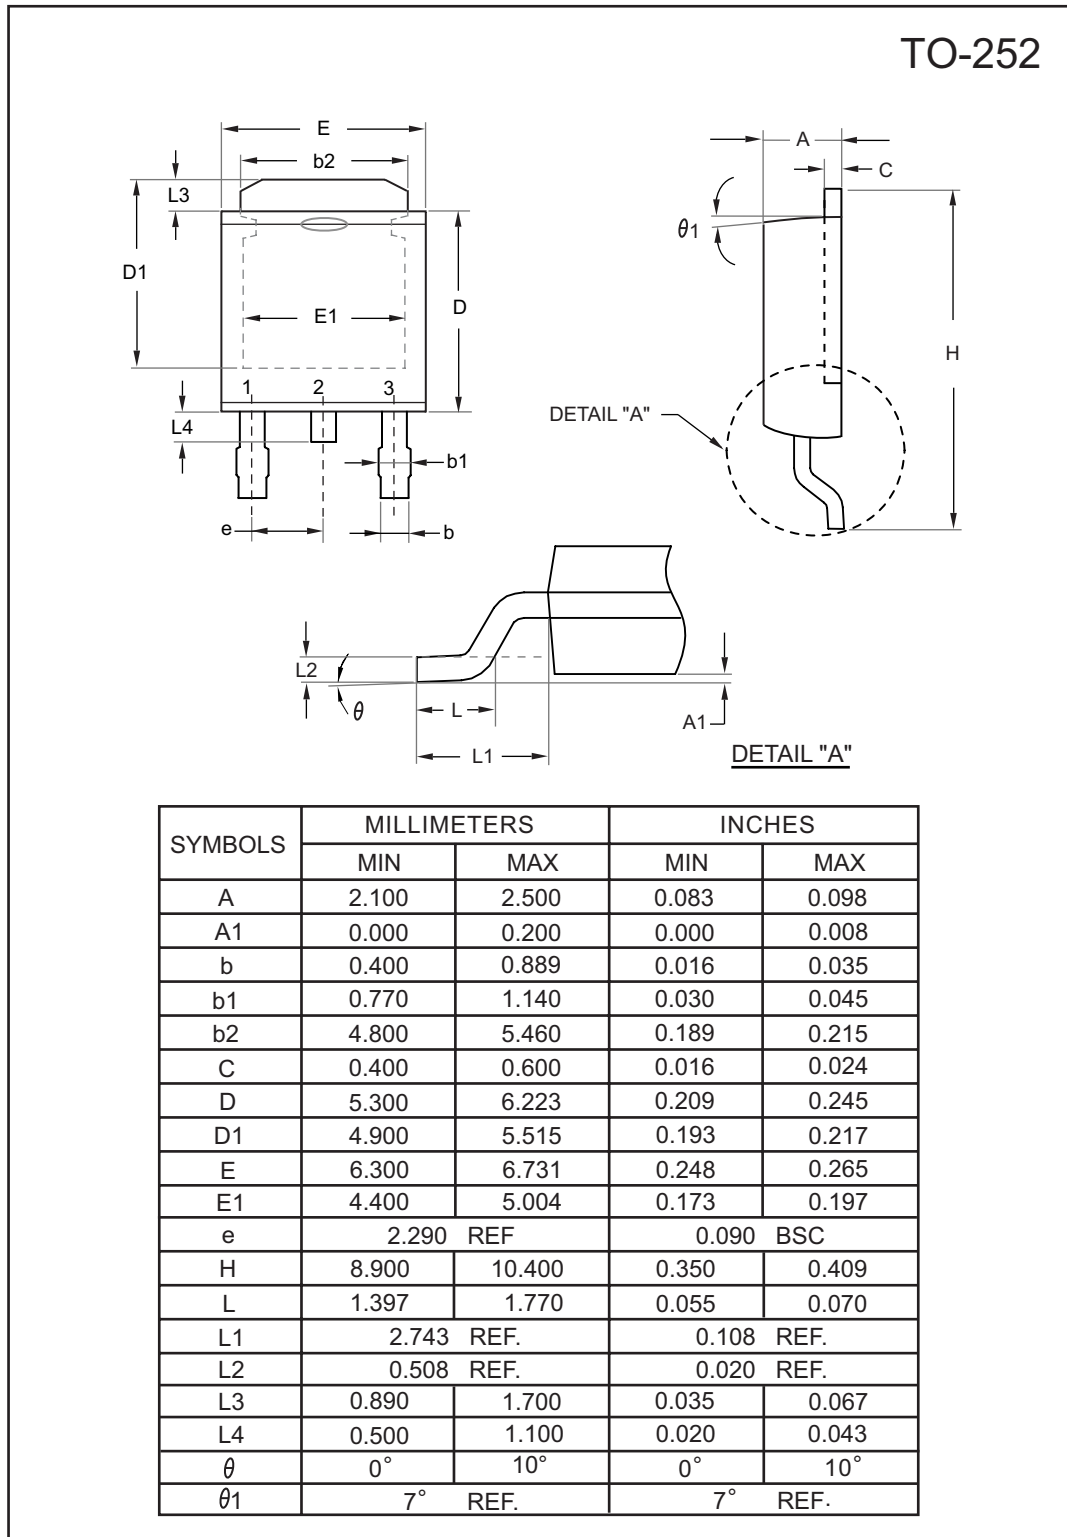


STU/D2455PLS

TO251 Tube/TO-252 Tape and Reel Data

TO-251 Tube

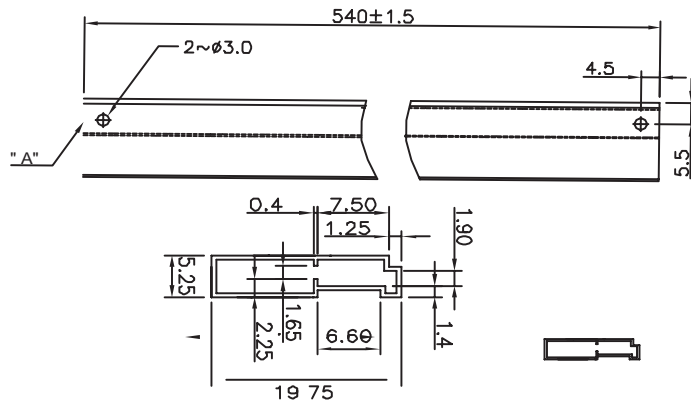


TO-252 Carrier Tape

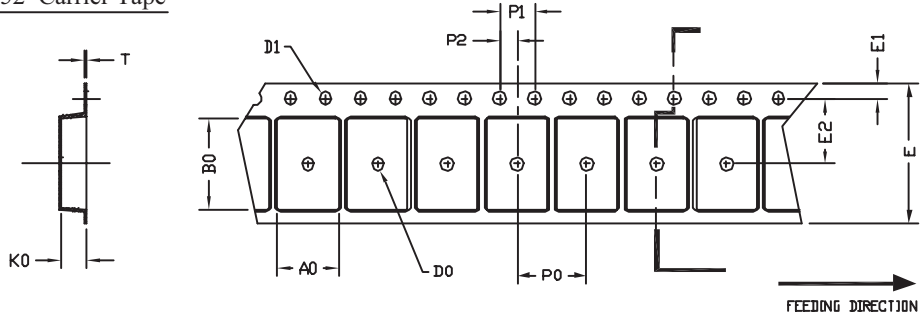

UNIT:mm

PACKAGE	A0	B0	K0	D0	D1	E	E1	E2	P0	P1	P2	T
TO-252 (16 mm)	6.80 ±0.1	10.3 ±0.1	2.50 ±0.1	φ2	φ1.5 +0.1 -0	16.0 0.3±	1.75 0.1±	7.5 ±0.15	8.0 ±0.1	4.0 ±0.1	2.0 ±0.15	0.3 ±0.05

TO-252 Reel

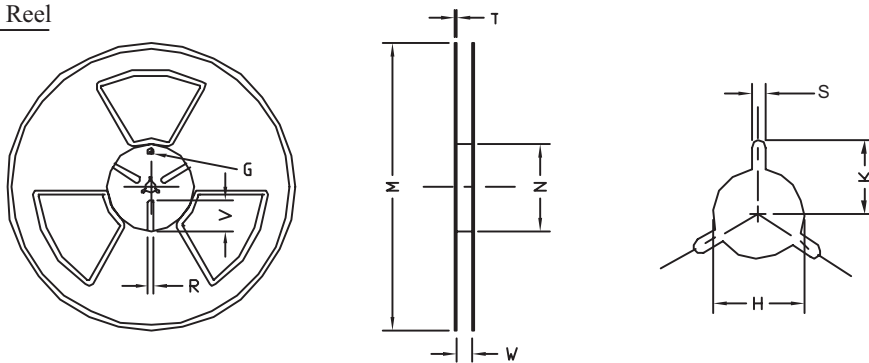

UNIT:mm

TAPE SIZE	REEL SIZE	M	N	W	T	H	K	S	G	R	V
16 mm	φ 330	φ 330 ± 0.5	φ 97 ± 1.0	17.0 + 1.5 - 0	2.2	φ 13.0 + 0.5 - 0.2	10.6	2.0 ±0.5	---	---	---