

### ■ Features


- Low profile surface mounted application in order to optimize board space.
- High current capability.
- High surge capability.
- Glass passivated chip junction inside.
- Suffix "G" indicates Halogen-free part, ex. GS3AG.
- Lead-free parts meet environmental standards of MIL-STD-19500 /228

### ■ Mechanical data

- Epoxy: UL94-V0 rated flame retardant
- Case : Molded plastic, DO-214AB / SMC
- Terminals : Solder plated, solderable per MIL-STD-750, Method 2026
- Polarity : Indicated by cathode band
- Weight : 0.007 ounce, 0.226 gram

### ■ Outline

SMC(DO-214AB)

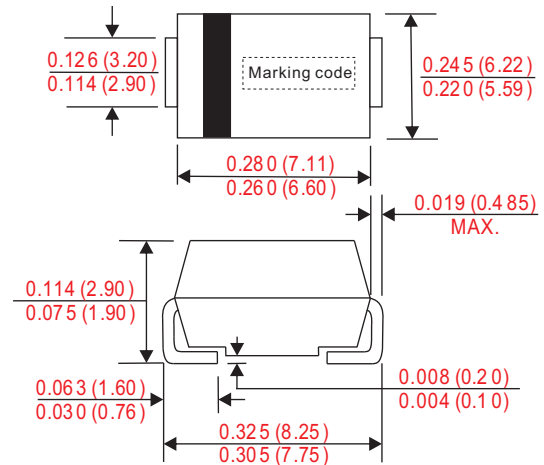

### ■ Maximum ratings and electrical characteristics

Rating at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.

Parameter	Conditions	Symbol	MIN.	TYP.	MAX.	UNIT
Forward rectified current		$I_O$			3.0	A
Forward surge current	8.3ms single half sine-wave superimposed on rate load (JEDEC method)	$I_{FSM}$			100	A
Reverse current	$V_R = V_{RRM}$ $T_A = 25^\circ\text{C}$	$I_R$			1.0	uA
	$V_R = V_{RRM}$ $T_A = 125^\circ\text{C}$				300	
Thermal resistance	Junction to ambient	$R_{\theta JA}$		47		°C/W
Diode junction capacitance	f=1MHz and applied 4V DC reverse voltage	$C_J$		53		pF
Storage temperature		$T_{STG}$	-50		+150	°C

Symbol	Marking code	Max. repetitive peak reverse voltage $V_{RRM}$ (V)	Max. RMS voltage $V_{RMS}$ (V)	Max. DC blocking voltage $V_R$ (V)	Max. forward voltage @3A, $T_A = 25^\circ\text{C}$ $V_F$ (V)	Max. reverse recovery time(1) $T_{rr}$ (us)	Operating temperature $T_J$ (°C)
GS3A	GS3A	50	35	50	1.10	2.5	-50 ~ +150
GS3B	GS3B	100	70	100			
GS3D	GS3D	200	140	200			
GS3G	GS3G	400	280	400			
GS3J	GS3J	600	420	600			
GS3K	GS3K	800	560	800			
GS3M	GS3M	1000	700	1000			

Note : 1.  $I_F = 0.5A$ ,  $I_R = 1.0A$ ,  $I_{RR} = 0.25A$

■ Rating and characteristic curves

FIG.1-TYPICAL FORWARD CHARACTERISTICS

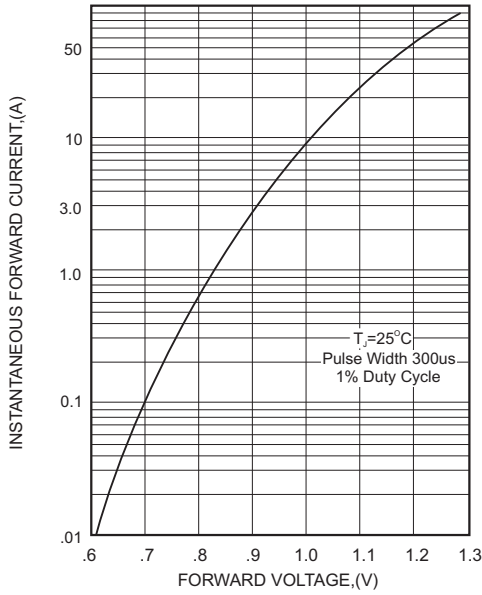


FIG.2-TYPICAL FORWARD CURRENT DERATING CURVE

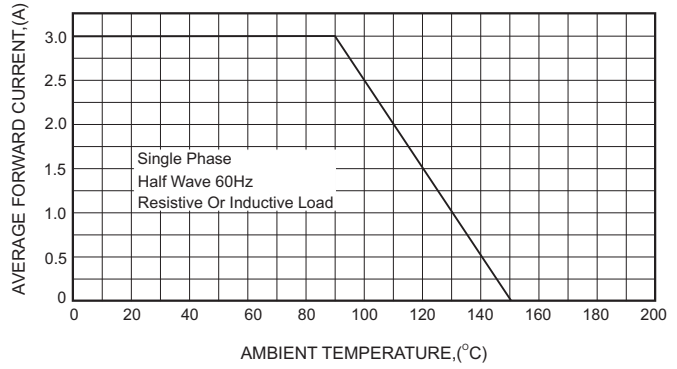


FIG.4-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

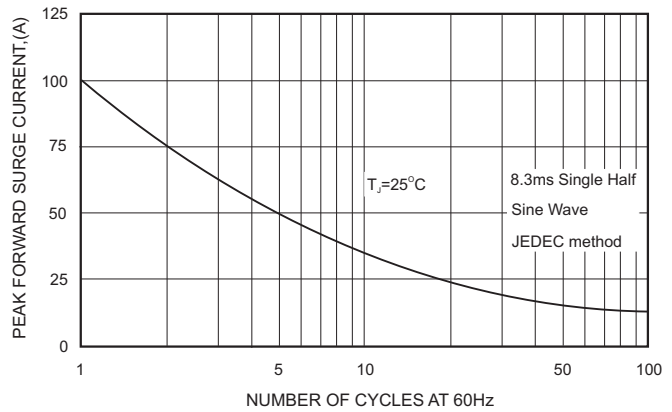


FIG.3 - TYPICAL REVERSE CHARACTERISTICS



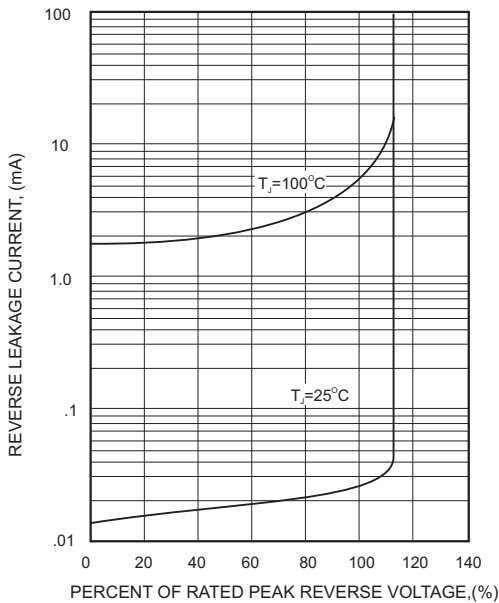


FIG.5-TYPICAL JUNCTION CAPACITANCE

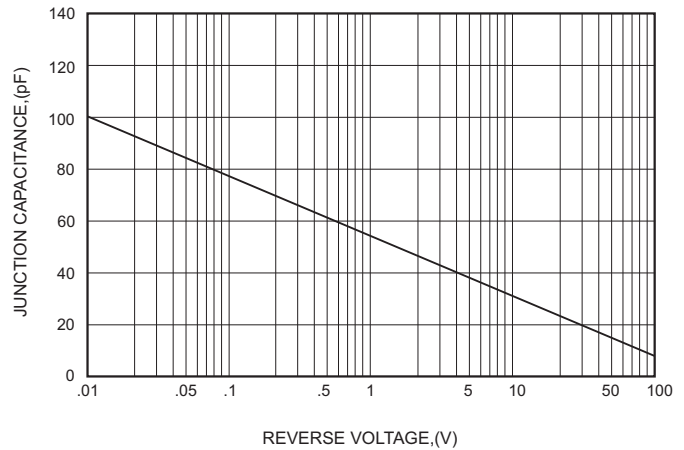

■ SMC foot print

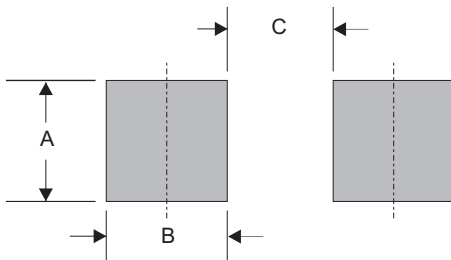

A	B	C
0.132 (3.30)	0.098 (2.50)	0.176 (4.40)

Dimensions in inches and (millimeters)

- CITC reserves the right to make changes to this document and its products and specifications at any time without notice.
- Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.
- CITC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does CITC assume any liability for application assistance or customer product design.
- CITC does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.
- No license is granted by implication or otherwise under any intellectual property rights of CITC.
- CITC products are not authorized for use as critical components in life support devices or systems without express written approval of CITC.