



TH97/2478



TH09/2479



IATF 0113686

SGS TH07/1033

1SS106

FEATURES :

- High reliability with glass seal
- Small temperature coefficient.
- Pb / RoHS Free


MECHANICAL DATA :

Case: DO-35 Glass Case

Weight: approx. 0.13g

SCHOTTKY BARRIER DIODES

DO - 35 Glass (DO-204AH)

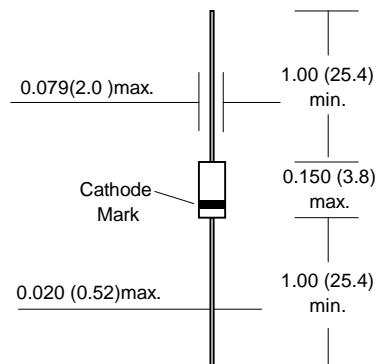

Dimensions in inches and (millimeters)

Maximum Ratings and Thermal Characteristics (Rating at 25 °C ambient temperature unless otherwise specified.)

Parameter	Symbol	Value	Unit
Reverse Voltage	V_R	10	V
Average Rectified Current	I_o	30	mA
Junction Temperature	T_J	125	°C
Storage temperature range	T_{stg}	-55 to + 125	°C

Note: (1) Valid provided that leads at a distance of 4mm from case are kept at ambient temperature.

Electrical Characteristics ($T_J = 25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Reverse Current	I_R	$V_R = 6 \text{ V}$	-	-	70	μA
Forward Current	I_F	$V_F = 1 \text{ V}$	4.5	-	-	mA
Diode Capacitance	C_d	$V_R = 1\text{V}, f = 1\text{MHz}$	-	-	1.5	pF



TH97/2478




TH09/2479



 IATF 0113686
 SGS TH07/1033

RATING AND CHARACTERISTIC CURVES (1SS106)

Forward Current VS. Forward Voltage

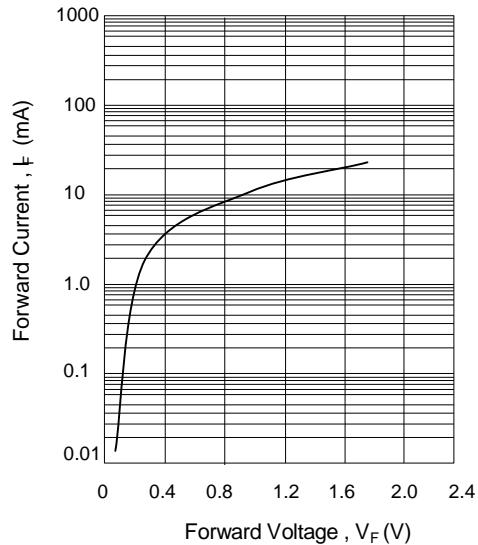

Reverse Current VS. Reverse Voltage

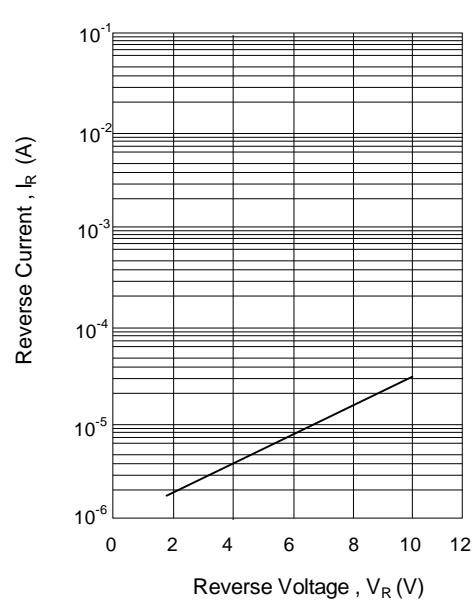

Diode capacitance VS. Reverse Voltage

