


GENERAL PURPOSE APPLICATION.
SWITCHING APPLICATION.

FEATURES

- Excellent h_{FE} Linearity.
: $h_{FE}(2)=25(\text{Min.})$ at $V_{CE}=-6V$, $I_C=-400mA$
- 1 Watt Amplifier Application.
- Complementary to KTC1020.

MAXIMUM RATING (Ta=25°C)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	V_{CBO}	-35	V
Collector-Emitter Voltage	V_{CEO}	-30	V
Emitter-Base Voltage	V_{EBO}	-5	V
Collector Current	I_C	-500	mA
Base Current	I_B	-100	mA
Collector Power Dissipation	P_C	400	mW
Junction Temperature	T_j	150	°C
Storage Temperature Range	T_{stg}	-55 ~ 150	°C

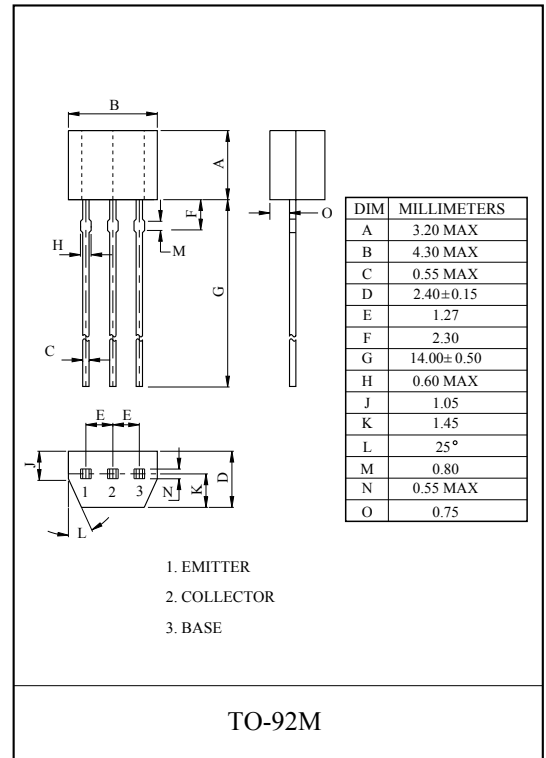


ELECTRICAL CHARACTERISTICS (Ta=25°C)


CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current	I_{CBO}	$V_{CB}=-35V$, $I_E=0$	-	-	-0.1	μA
Emitter Cut-off Current	I_{EBO}	$V_{EB}=-5V$, $I_C=0$	-	-	-0.1	μA
DC Current Gain	h_{FE}	$V_{CE}=-1V$, $I_C=-100mA$	100	-	240	
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=-100mA$, $I_B=-10mA$	-	-0.1	-0.25	V
Base-Emitter Voltage	V_{BE}	$V_{CE}=-1V$, $I_C=-100mA$	-	-0.8	-1.0	V
Transition Frequency	f_T	$V_{CE}=-6V$, $I_C=-20mA$	-	200	-	MHz
Collector Output Capacitance	C_{ob}	$V_{CB}=-6V$, $I_E=0$, $f=1MHz$	-	13	-	pF

KTA1021


$I_C - V_{CE}$

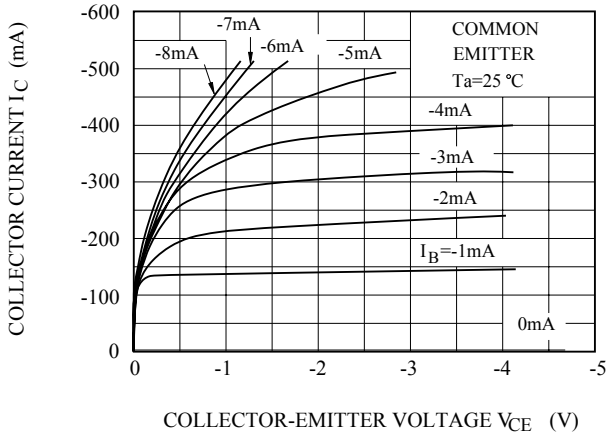


$h_{FE} - I_C$

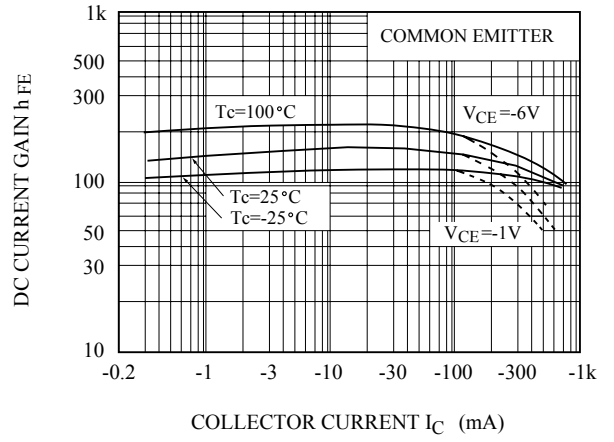

$V_{CE(sat)} - I_C$

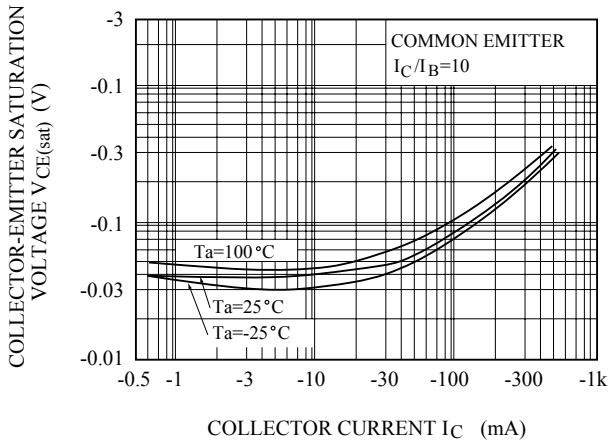

$I_B - V_{BE}$

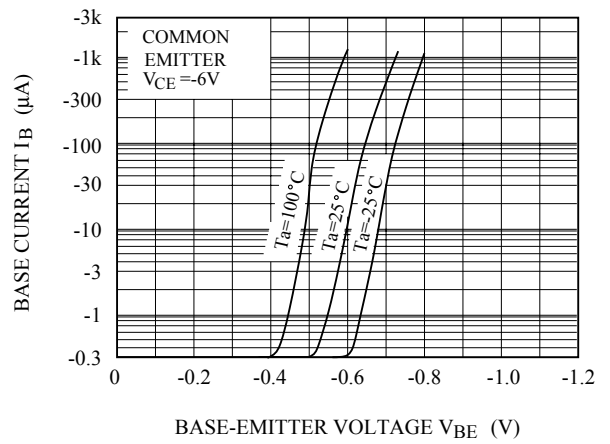

$P_c - T_a$

