

APT2X60/61S20J 200V 60A

DUAL DIE ISOTOP® PACKAGE HIGH VOLTAGE SCHOTTKY DIODES

PRODUCT APPLICATIONS	PRODUCT FEATURES	PRODUCT BENEFITS
<ul style="list-style-type: none"> • Parallel Diode <ul style="list-style-type: none"> -Switchmode Power Supply -Inverters • Free Wheeling Diode <ul style="list-style-type: none"> -Motor Controllers -Converters • Snubber Diode • Uninterruptible Power Supply (UPS) • 48 Volt Output Rectifiers • High Speed Rectifiers 	<ul style="list-style-type: none"> • Ultrafast Recovery Times • Soft Recovery Characteristics • Popular SOT-227 Package • Low Forward Voltage • High Blocking Voltage • Low Leakage Current 	<ul style="list-style-type: none"> • Low Losses • Low Noise Switching • Cooler Operation • Higher Reliability Systems • Increased System Power Density

MAXIMUM RATINGS

All Ratings are per diode: $T_C = 25^\circ\text{C}$ unless otherwise specified.

Symbol	Characteristic / Test Conditions	APT2X60/61S20J	UNIT
V_R	Maximum D.C. Reverse Voltage	200	Volts
V_{RRM}	Maximum Peak Repetitive Reverse Voltage		
V_{RWM}	Maximum Working Peak Reverse Voltage		
$I_F(\text{AV})$	Maximum Average Forward Current ($T_C = 110^\circ\text{C}$, Duty Cycle = 0.5)	60	Amps
$I_F(\text{RMS})$	RMS Forward Current	195	
I_{FSM}	Non-Repetitive Forward Surge Current ($T_J = 45^\circ\text{C}$, 8.3ms)	TBD	
T_J, T_{STG}	Operating and Storage Temperature Range	-55 to 150	$^\circ\text{C}$
T_L	Lead Temperature: 0.063" from Case for 10 Sec.	300	
E_{AVL}	Avalanche Energy (2A, 30mH)	60	

STATIC ELECTRICAL CHARACTERISTICS

Symbol	Characteristic / Test Conditions	MIN	TYP	MAX	UNIT	
V_F	Maximum Forward Voltage		$I_F = 60\text{A}$	0.83	0.90	Volts
			$I_F = 120\text{A}$.96		
			$I_F = 60\text{A}, T_J = 150^\circ\text{C}$		0.80	
I_{RM}	Maximum Reverse Leakage Current		$V_R = V_R \text{ Rated}$		1	mA
			$V_R = V_R \text{ Rated}, T_J = 125^\circ\text{C}$		25	
C_T	Junction Capacitance, $V_R = 100\text{V}$		285		pF	
L_S	Series Inductance (Lead to Lead 5mm from Base)		10		nH	

APT Website - <http://www.advancedpower.com>

USA 405 S.W. Columbia Street Bend, Oregon 97702-1035 Phone: (541) 382-8028 FAX: (541) 388-0364
EUROPE Chemin de Magret F-33700 Merignac - France Phone: (33) 5 57 92 15 15 FAX: (33) 5 56 47 97 61

DYNAMIC CHARACTERISTICS

APT2X60/61S20J


Symbol	Characteristic	MIN	TYP	MAX	UNIT
t_{rr1}	Reverse Recovery Time, $I_F = 1.0A$, $di_F/dt = -15A/\mu s$, $V_R = 30V$, $T_J = 25^\circ C$		TBD	TBD	ns
t_{rr2}	Reverse Recovery Time	$T_J = 25^\circ C$	65		
t_{rr3}	$I_F = 60A$, $di_F/dt = -100A/\mu s$, $V_R = 100V$	$T_J = 100^\circ C$	94		
t_{fr1}	Forward Recovery Time	$T_J = 25^\circ C$	TBD		
t_{fr2}	$I_F = 60A$, $di_F/dt = 100A/\mu s$, $V_R = 100V$	$T_J = 100^\circ C$	TBD		
I_{RRM1}	Reverse Recovery Current	$T_J = 25^\circ C$	3.6		Amps
I_{RRM2}	$I_F = 60A$, $di_F/dt = -100A/\mu s$, $V_R = 100V$	$T_J = 100^\circ C$	5.5		
Q_{rr1}	Recovery Charge	$T_J = 25^\circ C$	140		nC
Q_{rr2}	$I_F = 60A$, $di_F/dt = -100A/\mu s$, $V_R = 100V$	$T_J = 100^\circ C$	305		
V_{fr1}	Forward Recovery Voltage	$T_J = 25^\circ C$	TBD		Volts
V_{fr2}	$I_F = 60A$, $di_F/dt = 100A/\mu s$, $V_R = 100V$	$T_J = 100^\circ C$	TBD		
diM/dt	Rate of Fall of Recovery Current	$T_J = 25^\circ C$	TBD		A/ μs
		$T_J = 100^\circ C$	TBD		

THERMAL AND MECHANICAL CHARACTERISTICS

Symbol	Characteristic / Test Conditions	MIN	TYP	MAX	UNIT
$R_{\theta JC}$	Junction-to-Case Thermal Resistance			0.66	$^\circ C/W$
$R_{\theta JA}$	Junction-to-Ambient Thermal Resistance			20	
$V_{Isolation}$	RMS Voltage (50-60 Hz Sinusoidal Waveform from Terminals to Mounting Base for 1 Min.)	2500			Volts
W_T	Package Weight		1.03		oz
				29.2	
Torque	Maximum Torque (Mounting = 8-32 or 4mm Machine and Terminals = 4mm Machine)			13.6	lb•in
				1.5	N•m

APT Reserves the right to change, without notice, the specifications and information contained herein.

SOT-227 Package Outline

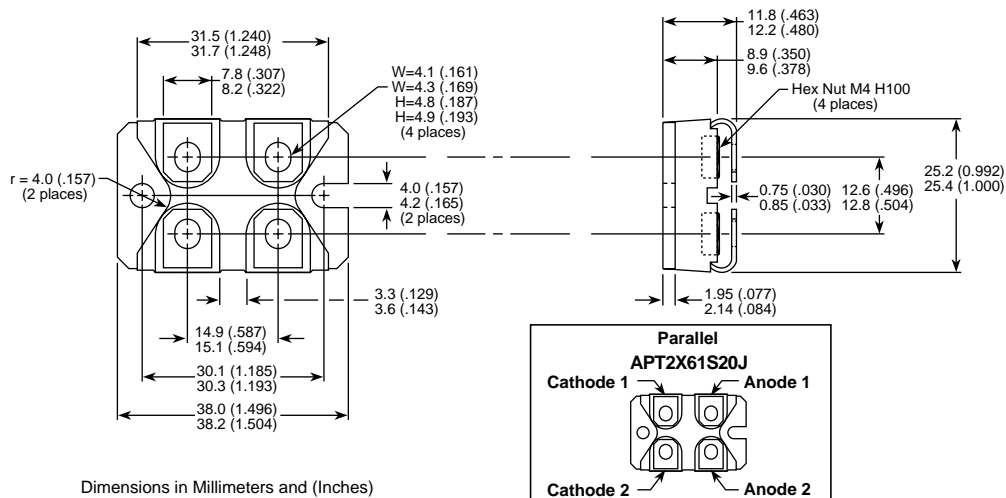

053-6044 Rev A 6-2002

APT's devices are covered by one or more of the following U.S. patents:
 ISOTOP® is a Registered Trademark of SGS Thomson.

4,895,810	5,045,903	5,089,434	5,182,234	5,019,522	5,262,336
5,256,583	4,748,103	5,283,202	5,231,474	5,434,095	5,528,058