



SK1C0A

Surface Mount Schottky Barrier Rectifier

FEATURES

- Ideal for automated placement
- Low forward voltage drop
- Low leakage current
- Meets environmental standard MIL-S-19500D
- Moisture sensitivity:level 1, per J-STD-020
- Solder dip 275 °C, 10 s
- Compliant to RoHS Directive 2002/95/EC and in accordance to WEEE 2002/96/EC



DO-214AC (SMA)

TYPICAL APPLICATIONS

For use in general purpose rectification of lighting, power supplies, inverters, converters and freewheeling diodes for consumer, automotive and telecommunication.

PRIMARY CHARACTERISTICS	
I _{F(AV)}	1A
V _{RRM}	200 V
I _{FSM}	30A
V _F	0.85V
T _J max.	150 °C

MECHANICAL DATA

Case: DO-214AC, molded epoxy body , Epoxy meets UL 94V-0 flammability rating

Terminals: Matte tin plated leads, solderable per J-STD-002 and JESD22B-106

Polarity: Laser Band Denotes Cathode Band

MAXIMUM RATINGS (T _A = 25 °C unless otherwise noted)			
PARAMETER	SYMBOL	SK1C0A	UNIT
Maximum repetitive peak reverse voltage	V _{RRM}	200	V
Maximum RMS voltage	V _{RMS}	140	V
Maximum DC blocking voltage	V _{DC}	200	V
Maximum average forward rectified current at TL (See Fig.1)	I _{F(AV)}	1	A
Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load	I _{FSM}	30	A
Operating junction temperature range	T _J	- 55 to + 150	°C
Storage temperature range	T _{stg}	- 55 to + 150	°C



SK1C0A

ELECTRICAL CHARACTERISTICS (TA = 25 °C unless otherwise noted)

PARAMETER	TEST CONDITIONS	SYMBOL	SK1C0A	UNIT
Maximum instantaneous forward voltage	IF=0.5A IF=1 A	V _F	0.8 0.85	V
Maximum DC reverse current at rated DC blocking voltage	TA=25	I _R	100	uA
	TA=125		500	
Typical junction capacitance	4.0 V, 1 MHz	C _J	35	pF

THERMAL CHARACTERISTICS (TA = 25 °C unless otherwise noted)

PARAMETER	SYMBOL	SK1C0A	UNIT
Typical thermal resistance	R _{θJA} (1)	80	°C/W
	R _{θJT} (2)	20	

Notes: (1) Thermal resistance from junction to ambient, $0.197 \times 0.197"$ (5.0 × 5.0mm) copper pads to each terminal
(2) Thermal resistance from junction to terminal, $0.197 \times 0.197"$ (5.0 × 5.0mm) copper pads to each terminal

RATINGS AND CHARACTERISTICS CURVES

(T = 25 °C unless otherwise noted)

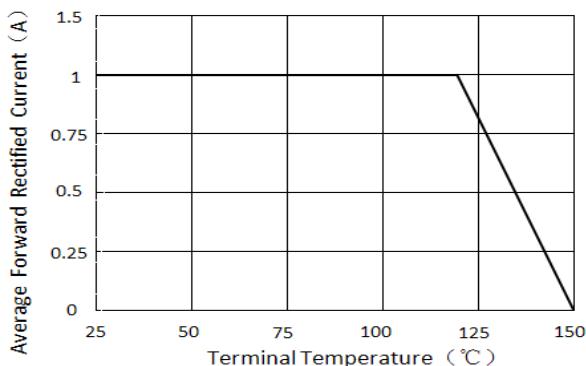


Figure 1. Forward Current Derating Curve

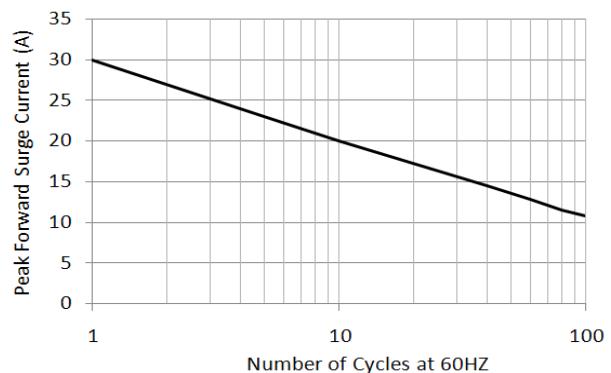


Figure 2. Maximum Non-repetitive Peak Forward Surge Current

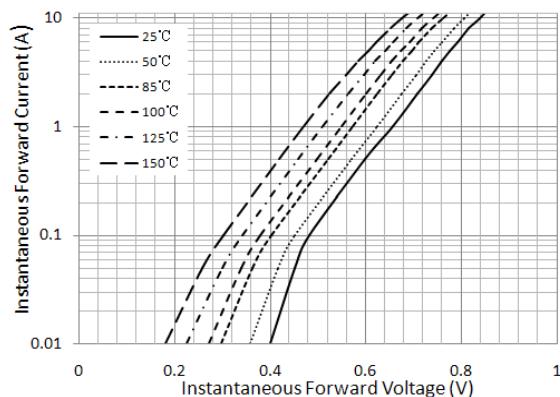


Figure 3. Typical Instantaneous Forward Characteristics

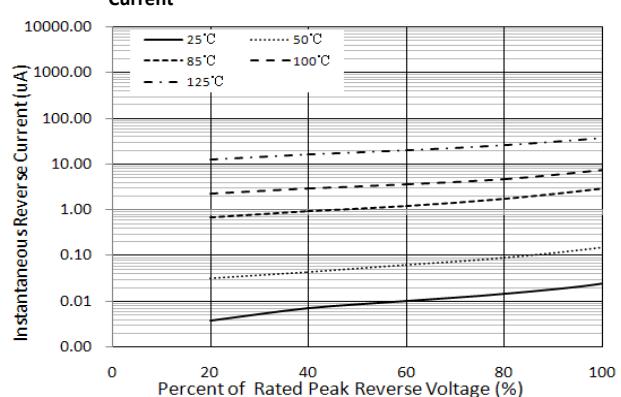


Figure 4. Typical Reverse Characteristics

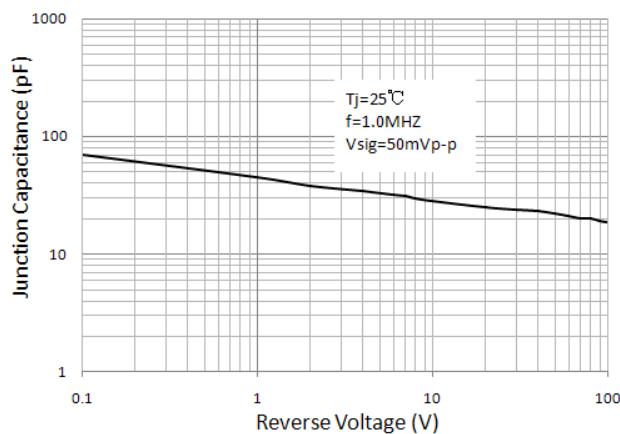


Figure 5. Typical Junction Capacitance

PACKAGE OUTLINE DIMENSIONS in inches (millimeters)

