

## Silicon PNP Power Transistors

BD318

**DESCRIPTION**

- With TO-3 package
- High DC current gain
- Excellent safe operating area
- Complement to type BD317

**APPLICATIONS**

- Designed for high power amplifiers

**PINNING (See Fig.2)**

PIN	DESCRIPTION
1	Base
2	Emitter
3	Collector

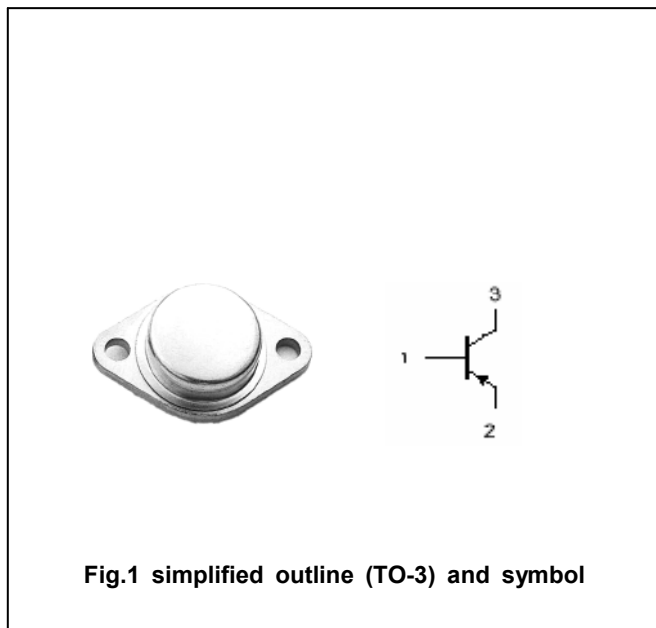


Fig.1 simplified outline (TO-3) and symbol

**Absolute maximum ratings(Ta=25□)**

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
V <sub>CBO</sub>	Collector-base voltage	Open emitter	-100	V
V <sub>CEO</sub>	Collector-emitter voltage	Open base	-100	V
V <sub>EBO</sub>	Emitter-base voltage	Open collector	-7	V
I <sub>C</sub>	Collector current		-16	A
I <sub>CM</sub>	Collector current(peak)		-20	A
I <sub>B</sub>	Base current		-5	A
P <sub>T</sub>	Total power dissipation	T <sub>C</sub> =25□	200	W
T <sub>j</sub>	Junction temperature		-65~200	□
T <sub>stg</sub>	Storage temperature		-65~200	□

**THERMAL CHARACTERISTICS**

SYMBOL	PARAMETER	MAX	UNIT
R <sub>th j-c</sub>	Thermal resistance from junction to case	0.875	□/W

## Silicon PNP Power Transistors

## BD318

## CHARACTERISTICS

T<sub>j</sub>=25°C unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
V <sub>CEO(SUS)</sub>	Collector-emitter sustaining voltage	I <sub>C</sub> =-0.2A ; I <sub>B</sub> =0	-100			V
V <sub>CEsat</sub>	Collector-emitter saturation voltage	I <sub>C</sub> =-8A ; I <sub>B</sub> =-0.8A			-1.0	V
V <sub>BEsat</sub>	Base-emitter saturation voltage	I <sub>C</sub> =-8A ; I <sub>B</sub> =-0.8A			-1.8	V
V <sub>BE(on)</sub>	Base-emitter on voltage	I <sub>C</sub> =-8A ; V <sub>CE</sub> =-2.0V			-1.5	V
I <sub>CBO</sub>	Collector cut-off current	V <sub>CB</sub> =100V; I <sub>E</sub> =0			-1.0	mA
I <sub>EBO</sub>	Emitter cut-off current	V <sub>EB</sub> =-7V; I <sub>C</sub> =0			-1.0	mA
h <sub>FE-1</sub>	DC current gain	I <sub>C</sub> =-5A ; V <sub>CE</sub> =-4V	25			
h <sub>FE-2</sub>	DC current gain	I <sub>C</sub> =-10A ; V <sub>CE</sub> =-4V	15			
f <sub>T</sub>	Transition frequency	I <sub>C</sub> =-1A ; V <sub>CE</sub> =-20V, f=0.2MHz	1			MHz

Silicon PNP Power Transistors

BD318

PACKAGE OUTLINE

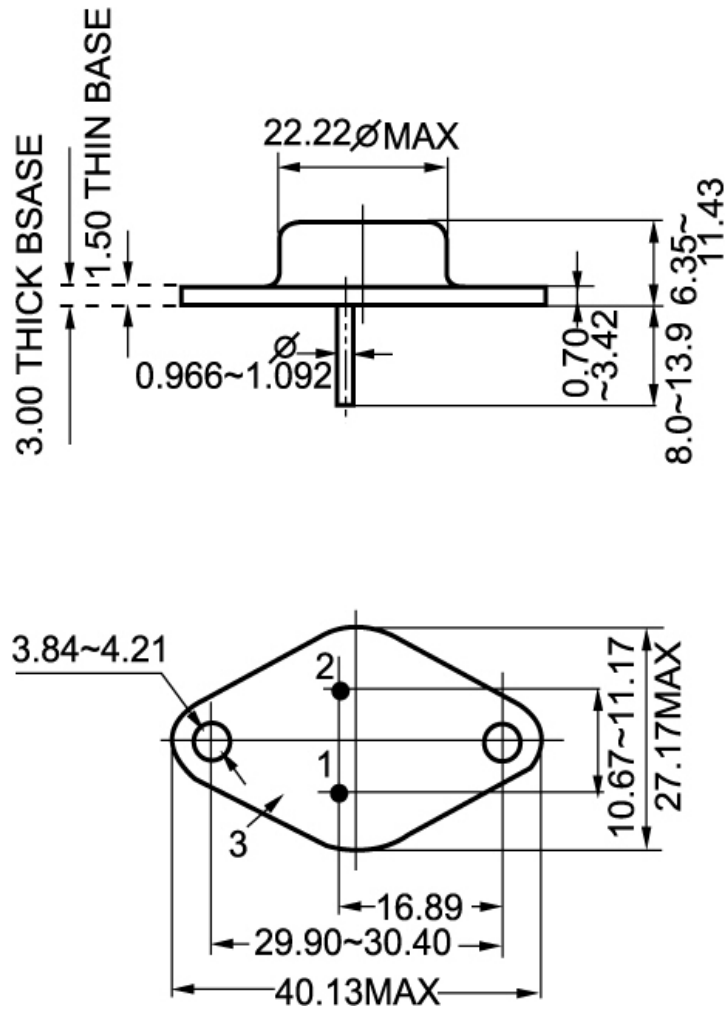


Fig.2 Outline dimensions