



Micro Commercial Components

Micro Commercial Components
20736 Marilla Street Chatsworth
CA 91311
Phone: (818) 701-4933
Fax: (818) 701-4939

KBJ10005G THRU KBJ1010G

10 Amp GLASS PASSIVATED BRIDGE RECTIFIERS 50 to 1000 Volts

Features

- Diffused Junction
- Low Forward Voltage Drop
- High Current Capability
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0 and MSL Rating 1
- Lead Free Finish/RoHS Compliant (NOTE 1)("P" Suffix designates RoHS Compliant. See ordering information)

Maximum Ratings

- Operating Junction Temperature: -55°C to +150°C
- Storage Temperature: -55°C to +150°C
- UL Recognized File # E165989


MCC Catalog Number	Device Marking	Maximum Recurrent Peak Reverse Voltage	Maximum RMS Voltage	Maximum DC Blocking Voltage
KBJ10005G	KBJ10005G	50V	35V	50V
KBJ1001G	KBJ1001G	100V	70V	100V
KBJ1002G	KBJ1002G	200V	140V	200V
KBJ1004G	KBJ1004G	400V	280V	400V
KBJ1006G	KBJ1006G	600V	420V	600V
KBJ1008G	KBJ1008G	800V	560V	800V
KBJ1010G	KBJ1010G	1000V	700V	1000V

Electrical Characteristics @ 25°C Unless Otherwise Specified

Average Forward Current	$I_{F(AV)}$	10A	$T_C = 100^\circ\text{C}$
Peak Forward Surge Current	I_{FSM}	120A	8.3ms, half sine
Maximum Forward Voltage Drop Per Element	V_F	1.1V	$I_{FM} = 5.0\text{A per element};$ $T_A = 25^\circ\text{C (Note 2)}$
Maximum DC Reverse Current At Rated DC Blocking Voltage	I_R	10 μA	$T_A = 25^\circ\text{C}$
I^2t Rating for fusing	I^2t	60A ² S	(t<8.3ms)

Notes: 1. High Temperature Solder Exemption Applied, see EU Directive Annex Notes 7
2. Pulse Test: Pulse Width 300usec, Duty Cycle 1%

KBJ

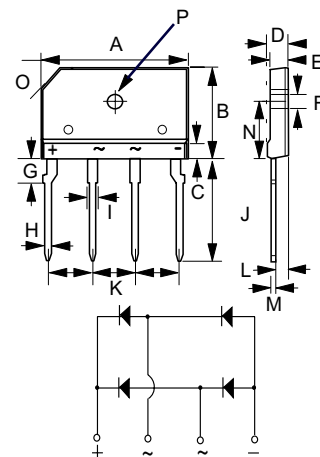

Case Type

DIM	DIMENSIONS				NOTE
	INCHES		MM		
	MIN	MAX	MIN	MAX	
A	.976	.992	24.80	25.20	
B	.579	.602	14.70	15.30	
C	.154	.161	3.90	4.10	
D	.173	.189	4.40	4.80	
E	.134	.150	3.40	3.80	
F	.122	.134	3.10	3.40	∅
G	.130	.146	3.30	3.70	
H	.035	.043	0.90	1.10	
I	.059	.075	1.50	1.90	
J	.677	.700	17.20	17.80	
K	.287	.303	7.30	7.70	
L	.098	.114	2.50	2.90	
M	.024	.031	0.60	0.80	
N	.366	.381	9.30	9.70	
O	.118X45°		3.0X45°		
P	.122	.134	3.10	3.40	∅


KBJ10005G THRU KBJ1010G

Rating and characteristic curves




Micro Commercial Components

Figure1
Maximum Forward Surge Current

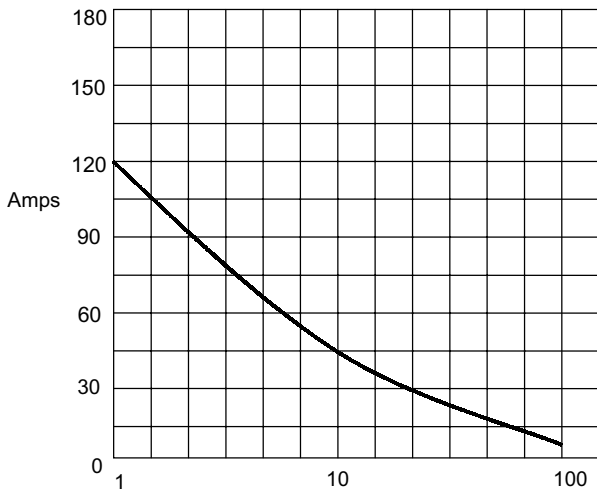


Peak Forward Surge Current - Amperes versus Number of Cycles At 60 Hz

Figure2
Derating Curve Output Rectified Current

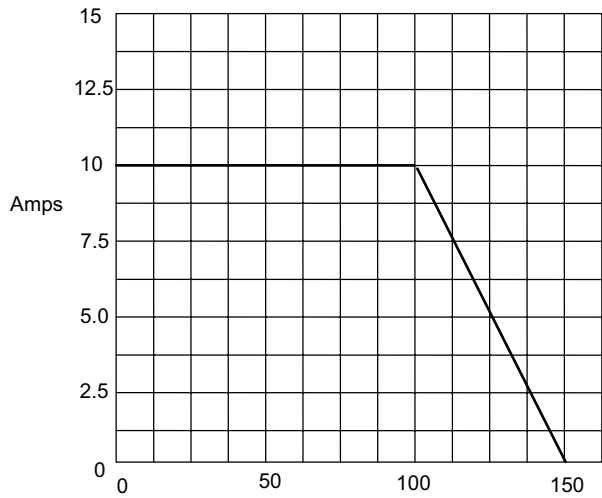


CASE TEMPERATURE 2 °C

Figure 3
Typical Forward Characteristics

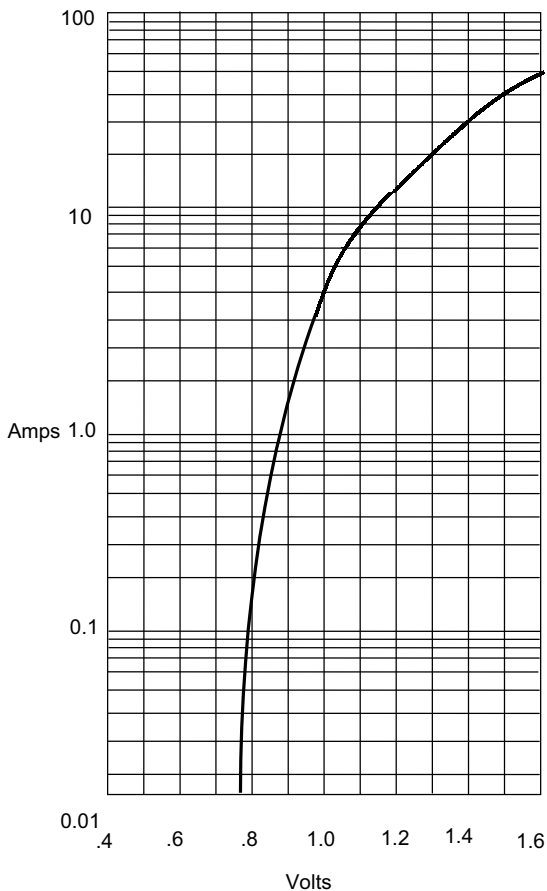

Instantaneous Forward Current -Amperes versus Instantaneous Forward Voltage - Volts

Figure 4
Typical Reverse Characteristics

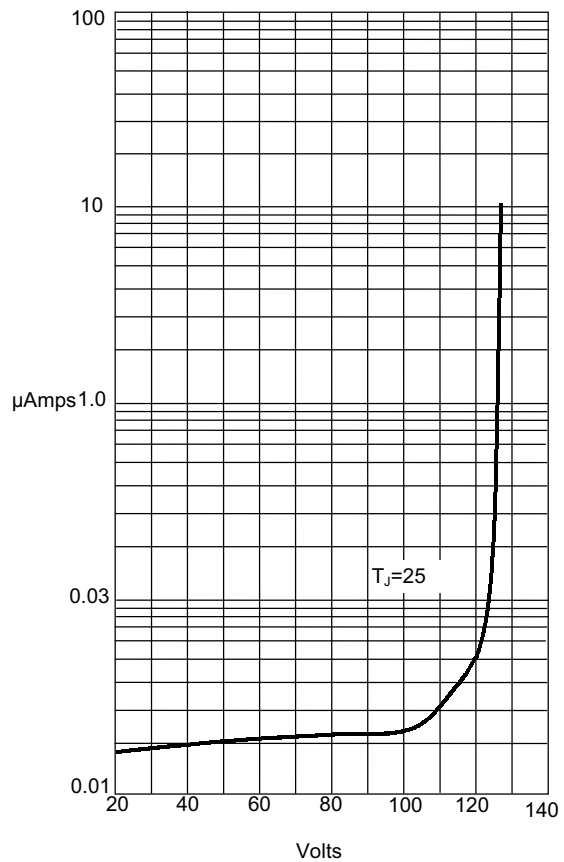

Instantaneous Reverse Current - MicroAmperes versus Percent of Rated Peak Reverse Voltage - Volts



Micro Commercial Components

Ordering Information

Device	Packing
(Part Number)-BP	Bulk; 15pcs/Tube

*****IMPORTANT NOTICE*****

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes . *Micro Commercial Components Corp.* does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp.* and all the companies whose products are represented on our website, harmless against all damages.

*****APPLICATIONS DISCLAIMER*****

Products offer by *Micro Commercial Components Corp.* are not intended for use in Medical, Aerospace or Military Applications.