



**CHENMKO ENTERPRISE CO.,LTD**

*Halogens free devices*

**SURFACE MOUNT ZENER**  
**SILICON PLANAR POWER ZENER DIODES**  
**VOLTAGE RANGE 2.4V TO 91V**

**MMKZ5221BGP**

**THRU**

**MMKZ5270BGP**

**FEATURE**


- \* High temperature soldering type.
- \* ESD rating of class 3(>16 kV) per human body model.
- \* Silicon planar zener diodes.
- \* Silicon-oxide passivated junction.
- \* Low temperature coefficient voltage
- \* 225 mW Rating on FR-4 or FR-5 Board

**MECHANICAL**

- \* Void-free, Transfer-molded, Thermosetting plastic case
- \* SOD-723 Packaging.
- \* Cathode indicated by polarity band.
- \* Mounting position: Any.



**SOD-723**

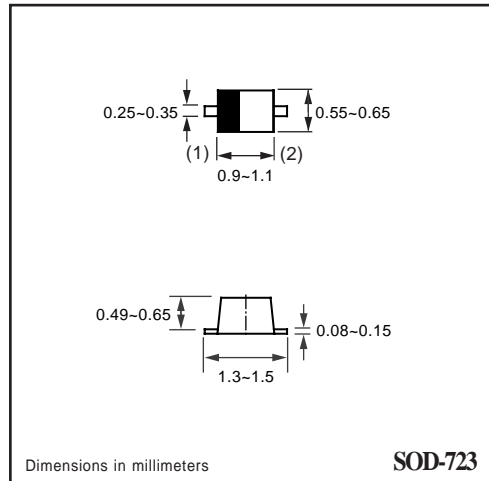

**SOD-723**

**CIRCUIT**



**MAXIMUM RATINGS** ( At  $T_A = 25^\circ\text{C}$  unless otherwise noted )

| RATINGS  | SYMBOL    | VALUE       | UNITS            |
|--|-----------|-------------|------------------|
| Zener Current ( see Table "Characteristics" )                | -         | -           | -                |
| Max. Steady State Power Dissipation @ $T_A=25^\circ\text{C}$ | $P_D$     | 225         | mW               |
| Max. Operating Temperature Range                             | $T_J$     | -65 to +150 | $^\circ\text{C}$ |
| Storage Temperature Range                                    | $T_{STG}$ | -65 to +150 | $^\circ\text{C}$ |

**ELECTRICAL CHARACTERISTICS** ( At  $T_A = 25^\circ\text{C}$  unless otherwise noted )

| CHARACTERISTICS   | SYMBOL          | MIN. | TYP. | MAX. | UNITS              |
|---|-----------------|------|------|------|--------------------|
| Thermal Resistance Junction to Ambient                  | $R_{\theta JA}$ | -    | -    | 550  | $^\circ\text{C/W}$ |
| Max. Instantaneous Forward Voltage at $I_F=10\text{mA}$ | $V_F$           | -    | -    | 0.9  | Volts              |

- NOTES :
1. The JEDEC type numbers listed have a standard tolerance on the normal zener voltage of  $\pm 10\%$ , Suffix B= $\pm 5\%$ .
  2. The zener impedance is derived from 1KHz AC voltage, which results when an AC current having an RMS value equal to 10% of DC zener current ( $I_{ZT}$  or  $I_{ZK}$ ) is superimposed on  $I_{ZT}$  or  $I_{ZK}$ . Zener impedance is measured at two points to insure a sharp knee on the breakdown curve to eliminate unstable units.
  3. Valid provided that electrodes at distance of 10mm from case are kept ambient temperature.
  4. Measured under thermal equilibrium and DC test conditions.
  5. The rating listed in the electrical characteristics table is maximum peak, non-repetitive, reverse surge current of 1/2 square wave or equivalent sine wave pulse of 1/120 second duration superimposed on the test current,  $I_{ZT}$ , per JEDEC registration.

2003-01





## ELECTRICAL CHARACTERISTICS ( MMKZ5221BGP THRU MMKZ5270BGP )

| TYPE        | Zener voltage<br>V <sub>Z</sub> (V) @ I <sub>ZT</sub> |       |       | Test<br>current<br><br>I <sub>ZT</sub> (mA) | Maximum Zener impedance                      |                        |                               | Maximum<br>reverse leakage current |                          | Type<br>temperature<br>coefficient<br>at<br>T <sub>A</sub> = 25°C<br>θ <sub>VZ</sub> (%/°C) | Maximum<br>regulator<br>current<br>at<br>T <sub>A</sub> = 50°C<br>I <sub>ZM</sub> (mA) |
|-------------|---|-------|-------|---|--|------------------------|-------------------------------|------------------------------------|--------------------------|---|--|
|             | Min   | Nom   | Max   |   | Z <sub>ZT</sub><br>at I <sub>ZT</sub><br>(Ω) | Z <sub>ZK</sub><br>(Ω) | at<br>I <sub>ZK</sub><br>(mA) | I <sub>R</sub><br>(μA)             | at V <sub>R</sub><br>(V) |   |  |
|             | Volts   | Volts | Volts |   |  |                        |                               |                                    |                          |   |  |
| MMKZ5221BGP | 2.280   | 2.4   | 2.520 | 5   | 100  | 1800                   | 0.25                          | 100                                | 1                        | -0.085  | 190  |
| MMKZ5222BGP | 2.375   | 2.5   | 2.625 | 5   | 100  | 1800                   | 0.25                          | 100                                | 1                        | -0.085  | 182  |
| MMKZ5223BGP | 2.565   | 2.7   | 2.835 | 5   | 100  | 1900                   | 0.25                          | 75                                 | 1                        | -0.080  | 168  |
| MMKZ5224BGP | 2.660   | 2.8   | 2.940 | 5   | 100  | 1900                   | 0.25                          | 75                                 | 1                        | -0.080  | 162  |
| MMKZ5225BGP | 2.850   | 3.0   | 3.150 | 5   | 95   | 2000                   | 0.25                          | 50                                 | 1                        | -0.075  | 152  |
| MMKZ5226BGP | 3.135   | 3.3   | 3.465 | 5   | 95   | 2200                   | 0.25                          | 25                                 | 1                        | -0.070  | 138  |
| MMKZ5227BGP | 3.420   | 3.6   | 3.780 | 5   | 90   | 2300                   | 0.25                          | 15                                 | 1                        | -0.065  | 126  |
| MMKZ5228BGP | 3.705   | 3.9   | 4.095 | 5   | 90   | 2400                   | 0.25                          | 10                                 | 1                        | -0.060  | 115  |
| MMKZ5229BGP | 4.085   | 4.3   | 4.515 | 5   | 88   | 2500                   | 0.25                          | 5                                  | 1                        | -0.055  | 106  |
| MMKZ5230BGP | 4.465   | 4.7   | 4.935 | 5   | 70   | 2200                   | 0.25                          | 3                                  | 1.5                      | +0.030  | 97   |
| MMKZ5231BGP | 4.845   | 5.1   | 5.355 | 5   | 50   | 2050                   | 0.25                          | 2                                  | 2                        | +0.030  | 89   |
| MMKZ5232BGP | 5.320   | 5.6   | 5.880 | 5   | 25   | 1800                   | 0.25                          | 5                                  | 3                        | +0.038  | 81   |
| MMKZ5233BGP | 5.700   | 6.0   | 6.300 | 5   | 25   | 1800                   | 0.25                          | 5                                  | 3                        | +0.038  | 76   |
| MMKZ5234BGP | 5.890   | 6.2   | 6.510 | 5   | 10   | 1300                   | 0.25                          | 1                                  | 4                        | +0.045  | 73   |
| MMKZ5235BGP | 6.460   | 6.8   | 7.140 | 5   | 8  | 750                    | 0.25                          | 1                                  | 5.2                      | +0.050  | 67   |
| MMKZ5236BGP | 7.125   | 7.5   | 7.875 | 5   | 7  | 600                    | 0.25                          | 0.5                                | 6                        | +0.058  | 61   |
| MMKZ5237BGP | 7.790   | 8.2   | 8.610 | 5   | 7  | 600                    | 0.25                          | 0.5                                | 6.5                      | +0.062  | 55   |
| MMKZ5238BGP | 8.265   | 8.7   | 9.135 | 5   | 7  | 600                    | 0.25                          | 0.5                                | 6.5                      | +0.065  | 52   |
| MMKZ5239BGP | 8.645   | 9.1   | 9.555 | 5   | 10   | 600                    | 0.25                          | 0.1                                | 7                        | +0.068  | 50   |
| MMKZ5240BGP | 9.500   | 10    | 10.50 | 5   | 15   | 600                    | 0.25                          | 0.1                                | 8                        | +0.075  | 45   |
| MMKZ5241BGP | 10.45   | 11    | 11.55 | 5   | 18   | 600                    | 0.25                          | 0.1                                | 8.4                      | +0.076  | 41   |
| MMKZ5242BGP | 11.40   | 12    | 12.60 | 5   | 22   | 600                    | 0.25                          | 0.1                                | 9.1                      | +0.077  | 38   |
| MMKZ5243BGP | 12.35   | 13    | 13.65 | 5   | 25   | 600                    | 0.25                          | 0.1                                | 9.9                      | +0.079  | 35   |
| MMKZ5244BGP | 13.30   | 14    | 14.70 | 5   | 25   | 600                    | 0.25                          | 0.1                                | 10                       | +0.082  | 32   |
| MMKZ5245BGP | 14.25   | 15    | 15.75 | 5   | 32   | 600                    | 0.25                          | 0.1                                | 11                       | +0.082  | 30   |
| MMKZ5246BGP | 15.20   | 16    | 16.80 | 5   | 36   | 600                    | 0.25                          | 0.1                                | 12                       | +0.083  | 28   |
| MMKZ5247BGP | 16.15   | 17    | 17.85 | 5   | 36   | 600                    | 0.25                          | 0.1                                | 13                       | +0.084  | 27   |
| MMKZ5248BGP | 17.10   | 18    | 18.90 | 5   | 42   | 600                    | 0.25                          | 0.1                                | 14                       | +0.085  | 25   |
| MMKZ5249BGP | 18.05   | 19    | 19.95 | 5   | 42   | 600                    | 0.25                          | 0.1                                | 14                       | +0.086  | 24   |
| MMKZ5250BGP | 19.00   | 20    | 21.00 | 5   | 48   | 600                    | 0.25                          | 0.1                                | 16                       | +0.086  | 23   |
| MMKZ5251BGP | 20.90   | 22    | 23.10 | 5   | 55   | 600                    | 0.25                          | 0.1                                | 17                       | +0.087  | 21   |
| MMKZ5252BGP | 22.80   | 24    | 25.20 | 5   | 62   | 600                    | 0.25                          | 0.1                                | 18                       | +0.088  | 19.1   |
| MMKZ5253BGP | 23.75   | 25    | 26.25 | 5   | 62   | 600                    | 0.25                          | 0.1                                | 19                       | +0.089  | 18.2   |
| MMKZ5254BGP | 25.65   | 27    | 28.35 | 5   | 70   | 600                    | 0.25                          | 0.1                                | 21                       | +0.090  | 16.8   |
| MMKZ5255BGP | 26.60   | 28    | 29.40 | 5   | 44   | 600                    | 0.25                          | 0.1                                | 21                       | +0.091  | 16.2   |
| MMKZ5256BGP | 28.50   | 30    | 31.50 | 5   | 78   | 600                    | 0.25                          | 0.1                                | 23                       | +0.091  | 15.1   |
| MMKZ5257BGP | 31.35   | 33    | 34.65 | 5   | 88   | 700                    | 0.25                          | 0.1                                | 25                       | +0.092  | 13.8   |

## ELECTRICAL CHARACTERISTICS ( MMKZ5221BGP THRU MMKZ5270BGP )

| TYPE        | Zener voltage<br>V <sub>Z</sub> (V) @ I <sub>ZT</sub> |       |       | Test<br>current      | Maximum Zener impedance                      |                        |                               | Maximum<br>reverse leakage current |                          | Type<br>temperature<br>coefficient<br>at<br>T <sub>A</sub> = 25°C<br>θ <sub>VZ</sub> (%/°C) | Maximum<br>regulator<br>current<br>at<br>T <sub>A</sub> = 50°C<br>I <sub>ZM</sub> (mA) |
|-------------|---|-------|-------|----------------------|--|------------------------|-------------------------------|------------------------------------|--------------------------|---|--|
|             | Min   | Nom   | Max   |                      | Z <sub>ZT</sub><br>at I <sub>ZT</sub><br>(Ω) | Z <sub>ZK</sub><br>(Ω) | at<br>I <sub>ZK</sub><br>(mA) | I <sub>R</sub><br>(μA)             | at V <sub>R</sub><br>(V) |   |  |
|             | Volts   | Volts | Volts | I <sub>ZT</sub> (mA) |  |                        |                               |                                    |                          |   |  |
| MMKZ5258BGP | 34.20   | 36    | 37.80 | 5                    | 95   | 700                    | 0.25                          | 0.1                                | 27                       | +0.093  | 13.8   |
| MMKZ5259BGP | 37.05   | 39    | 40.95 | 5                    | 130  | 800                    | 0.25                          | 0.1                                | 30                       | +0.094  | 12.6   |
| MMKZ5260BGP | 40.85   | 43    | 45.15 | 3.0                  | 93   | 900                    | 0.25                          | 0.1                                | 33                       | +0.095  | 11.6   |
| MMKZ5261BGP | 44.65   | 47    | 49.35 | 2.7                  | 105  | 1000                   | 0.25                          | 0.1                                | 36                       | +0.095  | 10.6   |
| MMKZ5262BGP | 48.45   | 51    | 53.55 | 2.5                  | 125  | 1100                   | 0.25                          | 0.1                                | 39                       | +0.096  | 9.7  |
| MMKZ5263BGP | 53.20   | 56    | 58.80 | 2.2                  | 150  | 1300                   | 0.25                          | 0.1                                | 43                       | +0.096  | 8.9  |
| MMKZ5264BGP | 57.00   | 60    | 63.00 | 2.1                  | 170  | 1400                   | 0.25                          | 0.1                                | 46                       | +0.097  | 11.6   |
| MMKZ5265BGP | 58.90   | 62    | 65.10 | 2.0                  | 185  | 1400                   | 0.25                          | 0.1                                | 47                       | +0.097  | -  |
| MMKZ5266BGP | 64.60   | 68    | 71.40 | 1.8                  | 230  | 1600                   | 0.25                          | 0.1                                | 52                       | +0.097  | -  |
| MMKZ5267BGP | 71.25   | 75    | 78.75 | 1.7                  | 270  | 1700                   | 0.25                          | 0.1                                | 56                       | +0.098  | -  |
| MMKZ5268BGP | 77.90   | 82    | 86.10 | 1.5                  | 330  | 2000                   | 0.25                          | 0.1                                | 62                       | +0.098  | -  |
| MMKZ5269BGP | 82.65   | 87    | 91.35 | 1.4                  | 370  | 2200                   | 0.25                          | 0.1                                | 68                       | +0.099  | -  |
| MMKZ5270BGP | 86.45   | 91    | 95.55 | 1.4                  | 400  | 2300                   | 0.25                          | 0.1                                | 69                       | +0.099  | -  |

# RATING CHARACTERISTIC CURVES ( MMKZ5221BGP THRU MMKZ5270BGP )

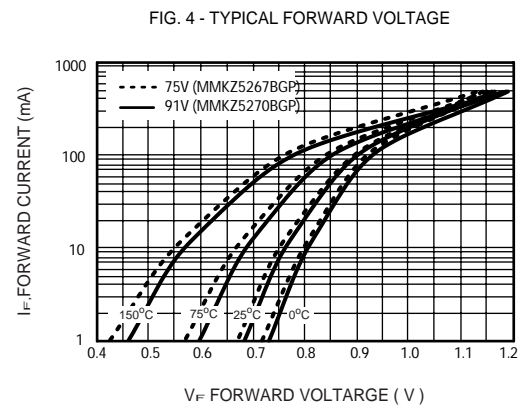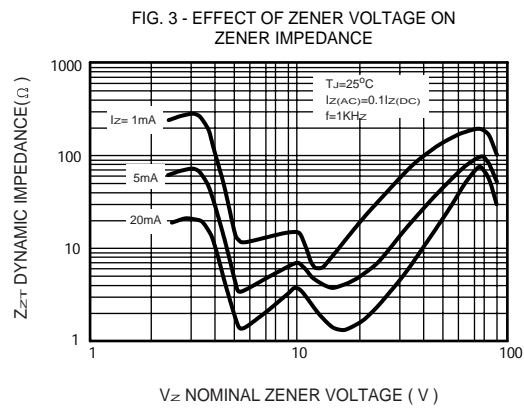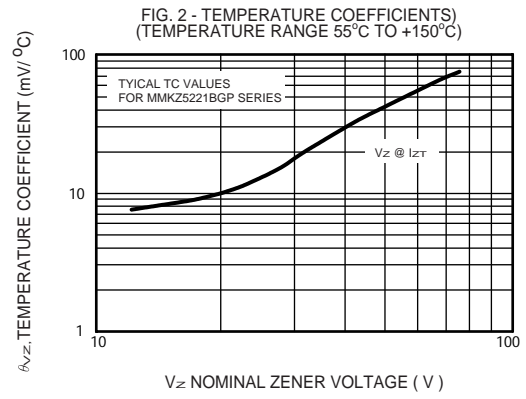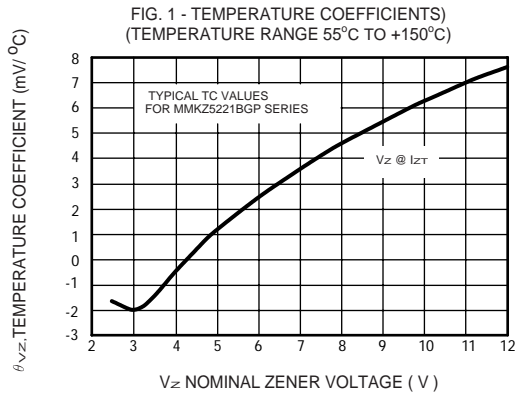

# RATING CHARACTERISTIC CURVES ( MMKZ5221BGP THRU MMKZ5270BGP )

FIG. 5 - TYPICAL CAPACITANCE

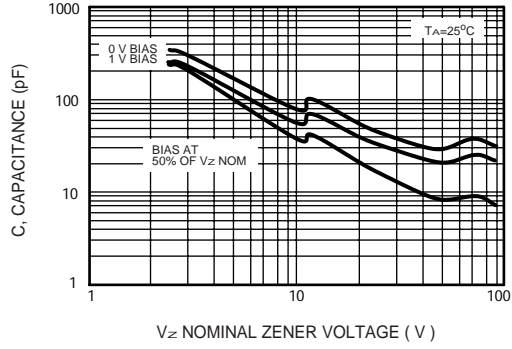


FIG. 6 - TYPICAL LEAKAGE CURRENT

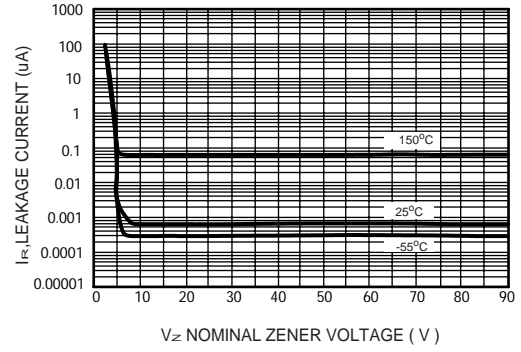


FIG. 7 - ZENER VOLTAGE VERSUS ZENER CURRENT ( $V_z$  UP TO 12V)

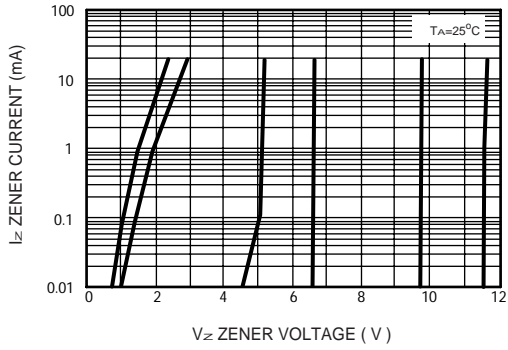


FIG. 8 - ZENER VOLTAGE VERSUS ZENER CURRENT (12V TO 91V)

